





# Soli surface mounted ADA

## T5 series

ADA compliant, energy efficient T5 linear fluorescent lampholder, two diffuser options. Units can be wall mounted vertically, horizontally, or on the ceiling. The finish is a powder coat paint. Soli is light in equilibrium: a pure linear statement that accents interior elements through light and silhouette. Light filters through and reflects off the curvature of the etched glass, spilling onto the surrounding surface. A single brilliant line in the center of the silhouetted body maintains the balance between light and dark.

### 2' Long

T5 Surface mounted

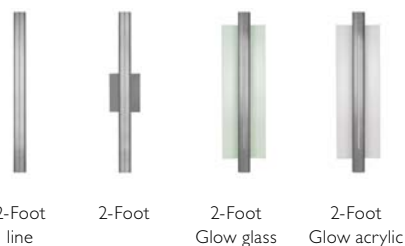



Catalog number	Description	Lamp (qty/type)	Ballast	Voltage
48021ALU	2-Foot line	1 x 14W T5 LF	Electronic	120V-277V
48021AL24U	2-Foot line HO	1 x 24W T5 LFHO	Electronic	120V-277V
40874	2-Foot glow glass			
40914	2-Foot glow acrylic			

**Note:** Order glass/diffuser separately.

LF = Linear fluorescent.  
HO = High output lamp.

### 3' Long

T5 Surface mounted

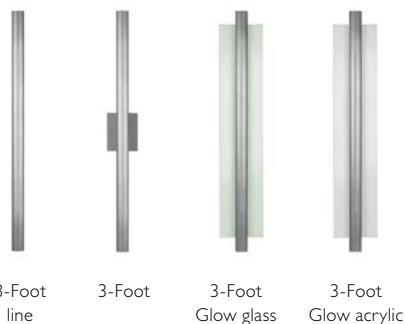



Catalog number	Description	Lamp (qty/type)	Ballast	Voltage
48022ALU	3-Foot line	1 x 21W T5 LF	Electronic	120V-277V
48022AL39U	3-Foot line HO	1 x 39W T5 LF HO	Electronic	120V-277V
40875	3-Foot glow glass			
40915	3-Foot glow acrylic			

**Note:** Order glass/diffuser separately.

LF = Linear fluorescent.  
HO = High output lamp.

### 4' Long

T5 Surface mounted

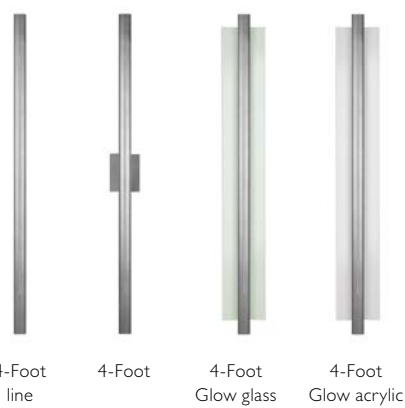

Catalog number	Description	Lamp (qty/type)	Ballast	Voltage
48023ALU	4-Foot line	1 x 28W T5 LF	Electronic	120V-277V
48023AL54U	4-Foot line HO	1 x 54W T5 LF HO	Electronic	120V-277V
40876	4-Foot glow glass			
40916	4-Foot glow acrylic			

**Note:** Order glass/diffuser separately.

Catalog number	Description	Lamp (qty/type)	Ballast	Voltage
48023ALUE	Emergency	1 x 28W T5	Electronic	120V-277V
48023AL54UE	Emergency HO	1 x 54W T5 HO	Electronic	120V-277V

**Note:** Bodine® integral emergency pack rated for 90 minutes of operation.

Catalog number	Description	Lamp (qty/type)	Ballast	Voltage
48023AL54MX1*	Dimming HO	1 x 54W T5 HO	Electronic	120V
48023AL54MX2*	Dimming HO	1 x 54W T5 HO	Electronic	277V
48023AL28DA	DALI	1 x 28W T5	Electronic	120V-277V
48023AL54DA	DALI HO	1 x 54W T5 HO	Electronic	120V-277V

**Note:** Order glass/diffuser separately.

LF = Linear fluorescent.  
HO = High output lamp.

### Digital Addressable Lighting Interface (DALI)

DALI is an open communication protocol used by multiple control and ballast manufacturers for digital control. Part of the Philips Lightolier IGEN Product Series.