



PRODUCT CATALOG

WWW.FSCLIGHTING.COM

TABLE OF CONTENTS

HIGH BAYS / LOW BAY SERIES

CLASSIC HIGH BAY - 8800 SERIES	4
ECONOBAY - 6500 SERIES	4
VAPORTITE HIGH BAY - 7900 SERIES	5
ACRYLIC HI/LO BAY - 6400 SERIES	5
ARCHITECTURAL HIGH BAY - 8900 SERIES	6
INDUCTION HIGH BAY - HBi SERIES	35
INDUCTION HIGH BAY - HBi2 SERIES	36

LINEAR PENDANT SERIES

WHITE CONTEMPORARY - 6100 SERIES	6
HALF MOON - 5800 SERIES	7
INDIRECT BASKET - 6200 SERIES	7
ARCHITECTURAL INDIRECT THIN LINE - 6900 SERIES	8

RECESSED SERIES

TROFFER - 7400 SERIES	8
RDI SIDE BASKET TROFFER - 5700 SERIES	9
RDI CENTER BASKET TROFFER - 5900 SERIES	9
RDI CENTER BASKET WITH BAFFLE - 9500 SERIES	10

LINEAR SURFACE MOUNT

SOLID OAK SURFACE MOUNT - 1100 SERIES	10
SOLID OAK WITH DROPPED DIFFUSER - 1300 SERIES	11
SOLID OAK DECORATIVE SURFACE MOUNT - 6700 SERIES	11
STEEL SIDED SURFACE MOUNT - 5500 SERIES	12
SQUARE EDGED CLOUD - 5100 SERIES	12
DECORATIVE SQUARE EDGED CLOUD - 5000 SERIES	13
TRADITIONAL CLOUD - 5200 SERIES	13
STEP CLOUD - 5300 SERIES	14
DECORATIVE SQUARE PUFF - 6800 SERIES	14
STEEL WRAPAROUND - 5600 SERIES	15
DECORATIVE THIN PROFILE WRAPAROUND - 25700 SERIES	15
DIRECT INDIRECT LINEAR BASKET - 6300 SERIES	16

CEILING MOUNT

DECORATIVE SQUARE PUFF - 6800 SERIES	14
ENCLOSED MUSHROOM - 7100 SERIES	16
ENCLOSED DRUM - 7200 SERIES	17
DECORATIVE NICKEL TRIM SURFACE MOUNT - 7300 SERIES	17
DECORATIVE LOW PROFILE SAUCER - 2000 SERIES	18
DECOARTIVE ROUND WITH FINIAL - 21000 SERIES	18
DECORATIVE ROUND CIRCLE - 22000	19

STRIPS

ACRYLIC INDUSTRIAL STRIP - 6600 SERIES	19
INDUSTRIAL STRIP WITH REFLECTOR - 8600 SERIES	20
NARROW STRIP T8 - 8200 SERIES	20
TWO LAMP STRIP T8 - 8500 SERIES	21
MINI STRIP T8 OR T5 - 8100 SERIES	21
COMPACT STRIP T8 OR T5 - 28100 SERIES	22
T8 SIDE MOUNT STRIP 1 LAMP - 8300 SERIES	22
T5 MINI SIDE MOUNT STRIP 1 LAMP - 28300 SERIES	23
T8 SIDE MOUNT STRIP 2 LAMP - 8400 SERIES	23
T5 MINI SIDE MOUNT STRIP 2 LAMP - 28400 SERIES	24
STAGGERED T5 OR T8 COMPACT - 28700 SERIES	24
LED DIMMABLE COVE LIGHT - CL SERIES	25

UNDER CABINET SERIES

THINCAB - 3000 SERIES	25
CLASSICAB - 3100 SERIES	26
MINICAB - 3500 SERIES	26
LED TUBELITE - TE SERIES	27

WALL MOUNT

TRADITIONAL ONE LAMP VANITY - 4100 SERIES	27
TRADITIONAL TWO LAMP VANITY - 4200 SERIES	28
BOX VANITY - 4300 SERIES	28
ARCHITECTURAL VANITY - 4400 SERIES	29
TUBE VANITY - 4600 SERIES	29
PUFF VANITY - 4500 SERIES	30
ROUNDED SCONCE - 4700 SERIES	30
DECORATIVE TRIANGULAR SCONCE - 9800 SERIES	31
DECORATIVE FROSTED GLASS SCONCE - 9900 SERIES	31
COMPACT WALL PACK - 9200 SERIES	32
EXTERIOR WALL LANTERN - 9300 SERIES	32
BULKHEADS - 9400 / 9600 SERIES	33

VAPORTITE VANDAL RESISTANT SERIES

VAPORTITE HIGH BAY - 7900 SERIES	5
VAPORTITE ENCLOSED STRIP - 7500 SERIES	33
COMPACT VAPORTITE ENCLOSED STRIP - 7600 SERIES	34
ROUND GASKETED LOCATION FIXTURE - 7700 SERIES	34
SQUARE GASKETED LOCATION FIXTURE - 7800 SERIES	34

INDUCTION

COBRA HEAD / STREET LIGHTING - iCOBRA SERIES	35
COBRA HEAD / STREET LIGHTING - iCOBRA2 SERIES	35
INDUCTION HIGH BAY - HBi SERIES	36
INDUCTION HIGH BAY - HBi2 SERIES	36
INDUCTION WALL PACK - WPi SERIES	37
INDUCTION WALL PACK - WPi2 SERIES	37
INDUCTION SQUARE GARAGE LIGHT - GLi SERIES	38
INDUCTION ROUND GARAGE LIGHT - GLi2 SERIES	38
INDUCTION ROUND GARAGE LIGHT - GLi3 SERIES	39
INDUCTION DESIGNER GARAGE LIGHT - GLi4 SERIES	39
INDUCTION LARGE CANOPY LIGHT - LCi SERIES	40
INDUCTION SMALL FLOOD - FLi SERIES	40
INDUCTION SHOEBOX - PLi SERIES	41
INDUCTION BULB - iBULB SERIES	41
INDUCTION ARCHITECTURAL AREA LIGHT - ALi SERIES	42

LED

LED DIMMABLE COVE LIGHT - CL SERIES	25
LED TUBELITE - TE SERIES	27
BULKHEADS - 9400 / 9600 SERIES	33

RETROFIT KITS

RETROFIT TROFFER KITS	42-44
-----------------------	-------

LAMPS AND BALLAST

LAMP AND BALLAST UPGRADES	45
---------------------------	----

OPTIONS

OPTIONS AND ACCESSORIES	46
-------------------------	----

TERMS & CONDITIONS

TERMS	47
CREDIT POLICIES	47
FREIGHT	47
CLAIMS	47
RETURNS	47

INDEX BY SERIES NUMBER

1100	10	5200	13	7800	34	GLi4	39
1300	11	5300	14	7900	5	HBi	36
2000	18	5500	12	8100	21	HBi2	36
21000	18	5600	15	8200	20	iBULB	41
22000	19	5700	9	8300	22	iCOBRA	35
25700	15	5800	7	8400	23	iCOBRA2	35
28100	22	5900	9	8500	21	LCi	40
28300	23	6100	6	8600	20	PLi	41
28400	24	6200	7	8800	4	TE	27
28700	24	6300	16	8900	6	WPi	37
28800	5	6400	5	9200	32	WPi2	37
3000	25	6500	4	9300	32	74 - RFK	43
3100	26	6600	19	9400	33	85 - RFK	42
3500	26	6700	11	9500	10	RDI BFL	44
4100	27	6800	14	9600	33	RDI BSK	44
4200	28	6900	8	9800	31	RDI XL	43
4400	29	7100	16	9900	31		
4300	28	7200	17	ALi	42		
4500	30	7400	8	CL	25		
4600	29	7300	17	FLi	40		
4700	30	7500	33	GLi	38		
5000	13	7600	34	GLi2	38		
5100	12	7700	34	GLi3	39		



MISSION STATEMENT

Our mission is to be a leading manufacturer and innovator of energy efficient lighting products to; commercial, residential and utility markets. As a team, we will achieve the highest customer service standards in the industry. We will accomplish this by exceeding the expectations of our distributors and customers while using every resource to ensure a quality product. We will attract, hire and retain quality employees and representatives to make sure our customers know that they are number one. When our customers speak, FSC listens.

FSC LIGHTING



FSC has been a leader in the residential market for over 40 years. We also offer a full line of commercial, Induction and LED fixtures of superior quality and reliability. Most of our products are manufactured in the USA and qualify for the Buy America Act instituted by the Federal Government. Our exceptional products and outstanding customer service makes FSC the best choice for your lighting needs.

CLASSIC HIGH BAY • 8800 SERIES

An energy efficient fixture for cost effective lighting of medium and hi bay warehouses, manufacturing plants, sports facilities and retail spaces. Post painted white powder coat steel housing for extreme durability in harsh environments. T5 standard with Miro4™ reflector and T8 with white reflector.



8848-454-M

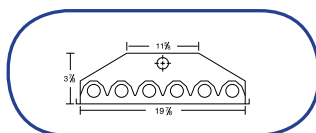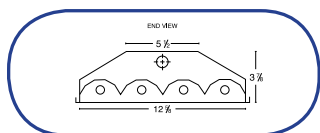

T5 / T8 Lamps		
Item #	Lamps	W-L-D
8848-432/1	4-F32T8	12 5/8" - 48" - 3 7/8"
8848-454/1	4-F54T5HO	12 5/8" - 48" - 3 7/8"
8849-632/2	6-F32T8	19 7/8" - 48" - 3 7/8"
8849-654/2	6-F54T5HO	19 7/8" - 48" - 3 7/8"

OPTIONS*



- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- OS (Occupancy Sensor)
- OSD (Occupancy Sensor with Daylight)
- LSB (GE Load Shedding Ballast)
- WG (Wireguard)
- WL (GE Lamps Installed)
- WLCG (GE Covrguard Shatter Resistant Lamps)
- DFL (Doorframe and Lens)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- 480 (480 volt)

ECONOBAY • 6500 SERIES

The Miro4™ or White reflector system of the EconoBay delivers a new level of performance and control for High and Low Bay applications. Uses either T5 or T8 lamps. Simple design provides excellent optical performance in an economical high bay package. T5 standard with Miro4™ reflector and T8 with white reflector.



6549-632/2-W



T5 / T8 Lamps		
Item #	Lamps	W-L-D
6548-432/1	4-F32T8	12 3/8" - 48" - 3 7/8"
6548-454/1	4-F54T5HO	12 3/8" - 48" - 3 7/8"
6549-632/2	6-F32T8	14 1/4" - 48" - 3 7/8"
6549-654/2	6-F54T5HO	14 1/4" - 48" - 3 7/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- OS (Occupancy Sensor)
- PC (Photocell)
- LSB (GE Load Shedding Ballast)
- WL (GE Lamps Installed)
- WLCG (GE Covrguard Shatter Resistant Lamps)
- OSD (Occupancy Sensor with Daylight)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- 480 (480 volt)

VAPORTITE HIGH BAY • 7900 SERIES

Suitable for wet location and IP65 rated, this fixture is appropriate for those applications that may require wash ability or hose down. Stainless steel latches provide durability and chemical resistance. Multiple latches can be made tamper resistant. Lens is made of impact resistant acrylic for maximum light transmission, longevity, temperature extremes and impact resistance. This fixture is easily mounted with V hooks or cables.


T5 / T8 Lamps		
Item #	Lamps	W-L-D
7948-432/1	4-F32T8	14 1/8" - 52 1/4" - 6"
7948-454/1	4-F54T5HO	14 1/8" - 52 1/4" - 6"
7949-632/2	6-F32T8	14 1/8" - 52 1/4" - 6"
7949-654/2	6-F54T5HO	14 1/8" - 52 1/4" - 6"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- OS (Occupancy Sensor)
- PC (Polycarbonate Lens)
- WL ( GE Lamps Installed)
- SPR (Specular Reflector)
- 480 (480 volt)



7948-454

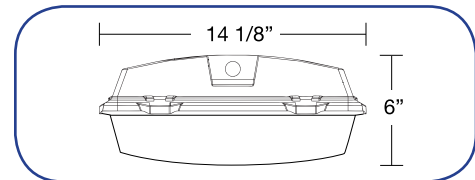

ACRYLIC HI/LO BAY • 6400 SERIES

A modern design that utilizes both acrylic and metal reflector technology for exceptional performance. This unique design is suitable for both high and low bay applications and gives off both direct and indirect light. Comes standard with Miro4™ reflector.


T5 / T8 Lamps		
Item #	Lamps	W-L-D
6448-432/1	4-F32T8	13 5/8" - 48" - 3 15/16"
6448-432/2	4-F32T8	13 5/8" - 48" - 3 15/16"
6448-454/1	4-F54T5HO	13 5/8" - 48" - 3 15/16"
6449-632/2	6-F32T8	16 1/4" - 48" - 3 15/16"
6449-632/3	6-F32T8	16 1/4" - 48" - 3 15/16"
6449-654/2	6-F54T5HO	16 1/4" - 48" - 3 15/16"



6448-454

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WL ( GE Lamps Installed)
- WLCG ( GE Covrguard Shatter Resistant Lamps)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- 480 (480 volt)




*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

ARCHITECTURAL HIGH BAY • 8900 SERIES

An energy effective architectural HibaY with reflector and decorative louver provides maximum light output. Ideal for a variety of applications including office buildings and classrooms



8948-332/1

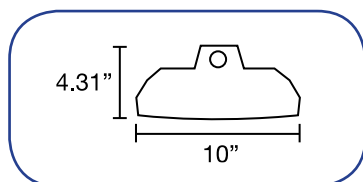

T5 / T8 Lamps		
Item #	Lamps	W-L-D
8948-332/1	3-F32T8	10" - 48" - 4 1/3"
8948-354/1	3-F54T5HO	10" - 48" - 4 1/3"
8948-432/1	4-F32T8	10" - 48" - 4 1/3"
8948-454/1	4-F54T5HO	10" - 48" - 4 1/3"

OPTIONS*


- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WL (GE Lamps Installed)
- WLCG (GE Covrguard Shatter Resistant Lamps)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- 480 (480 volt)

WHITE CONTEMPORARY • 6100 SERIES

Modular steel fixture finished in white. Perfect for open plan offices and conference rooms where task surfaces are the focus.



6148-232-DC



T8 Lamps		
Item #	Lamps	W-L-D
6148-132	1-F32T8	12 1/4" - 48" - 5 1/4"
6148-232	2-F32T8	12 1/4" - 48" - 5 1/4"

T5 Lamps		
Item #	Lamps	W-L-D
6148-128	1-F28T5	12 1/4" - 48" - 5 1/4"
6148-228	2-F28T5	12 1/4" - 48" - 5 1/4"
6148-154	1-F54T5HO	12 1/4" - 48" - 5 1/4"
6148-254	2-F54T5HO	12 1/4" - 48" - 5 1/4"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- SWL (Smooth White Lens)
- FFL (Fine/Fluted Lens)
- DC (Dual Cable)
- WL (GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

HALF MOON • 5800 SERIES


A modern direct/indirect fixture in a bright white finish for attractive glare free lighting in offices, conference rooms, reception areas and classrooms. Dual cable and joiner options available.

T5 Lamps		
Item #	Lamps	W-L-D
5848-128	1-F28T5	10 3/4" - 48" - 4 1/8"
5848-154	1-F54T5HO	10 3/4" - 48" - 4 1/8"
5848-228	2-F28T5	10 3/4" - 48" - 4 1/8"
5848-254	2-F54T5HO	10 3/4" - 48" - 4 1/8"
5848-328/1	3-F28T5	10 3/4" - 48" - 4 1/8"
5848-354/1	3-F54T5HO	10 3/4" - 48" - 4 1/8"
5896-128T/1	2-F28T5	10 3/4" - 96" - 4 1/8"
5896-154T/1	2-F54T5HO	10 3/4" - 96" - 4 1/8"
5896-228T/1	4-F28T5	10 3/4" - 96" - 4 1/8"
5896-254T/1	4-F54T5HO	10 3/4" - 96" - 4 1/8"

T8 Lamps		
Item #	Lamps	W-L-D
5848-132	1-F32T8	10 3/4" - 48" - 4 1/8"
5848-232	2-F32T8	10 3/4" - 48" - 4 1/8"
5848-332/1	3-F32T8	10 3/4" - 48" - 4 1/8"
5848-332/2	3-F32T8	10 3/4" - 48" - 4 1/8"
5896-232T/1	4-F32T8	10 3/4" - 96" - 4 1/8"
5896-232T/2	4-F32T8	10 3/4" - 96" - 4 1/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- DC (Dual Cable)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- JNR (Joiner)
- DHS (Daylight Harvesting)



INDIRECT BASKET • 6200 SERIES


Contemporary fixture finished in bright white to blend in with almost any office, lobby or public area. Dual cable mounting available.

T8 Lamps		
Item #	Lamps	W-L-D
6248-132	1-F32T8	14 1/2" - 48" - 4 3/8"
6248-232	2-F32T8	14 1/2" - 48" - 4 3/8"

T5 Lamps		
Item #	Lamps	W-L-D
6248-128	1-F32T8	14 1/2" - 48" - 4 3/8"
6248-228	2-F32T8	14 1/2" - 48" - 4 3/8"
6248-154	1-F54T5HO	14 1/2" - 48" - 4 3/8"
6248-254	2-F54T5HO	14 1/2" - 48" - 4 3/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- DC (Dual Cable)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)



ARCHITECTURAL INDIRECT THIN LINE • 6900 SERIES

This Architectural fixture provides ambient lighting for virtually glare free and shadow free illumination. Comes standard in perforated white powder coat housing, also available with an overlay lens, semi-specular or white louver. Other finish options available. A companion to our Architectural Vanity 4400 series.



6948-232
Finish codes, see pg. 42



6948-232-OL



6948-232-LV-W


T8 Lamps		
Item #	Lamps	W-L-D
6948-232	2-F32T8	7 3/4" - 56 1/2" - 2"
6996-232T/1	4-F32T8	7 3/4" - 104 1/2" - 2"
6996-232T/2	4-F32T8	7 3/4" - 104 1/2" - 2"

T5 Lamps		
Item #	Lamps	W-L-D
6948-254	2-F54T5HO	7 3/4" - 56 1/2" - 2"
6948-354/1	3-F54T5HO	7 3/4" - 56 1/2" - 2"
6996-254T/1	4-F54T5HO	7 3/4" - 104 1/2" - 2"
6996-254T/2	4-F54T5HO	7 3/4" - 104 1/2" - 2"
6996-354T/2	6-F54T5HO	7 3/4" - 104 1/2" - 2"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- DC (Dual Cable)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)
- OL (Overlay Lens)
- LV-W (White Louver)
- LV-SS (Semi-specular Louver)

END VIEW



TROFFER • 7400 SERIES

Framed troffer with clear prismatic acrylic diffuser. Hinged and flush mounted metal door frame for quick and easy maintenance. Available as either a suspended unit for T-bar applications or flange type fixture for drywall applications. Several Parabolic louver options are also available.



7424-432/1-FL-P2




T8 Lamps		
Item #	Lamps	W-L-D
7414-232	2-F32T8	12" - 48" - 6"
7422-232-U6	2-F32T8-U6	24" - 24" - 6"
7424-332/1	3-F32T8	24" - 48" - 4"
7424-332/2	3-F32T8	24" - 48" - 4"
7424-432/1	4-F32T8	24" - 48" - 4"
7424-432/2	4-F32T8	24" - 48" - 4"
7414-232-FL	2-F32T8	12" - 48 1/4" - 5 1/8"
7422-232-U6-FL	2-F32T8-U6	24" - 24 1/4" - 5 1/8"
7424-432/1-FL	4-F32T8	24" - 48 1/4" - 5 1/8"
7424-432/2-FL	4-F32T8	24" - 48 1/4" - 5 1/8"

T5 Lamps		
Item #	Lamps	W-L-D
7414-228	2-F28T5	12" - 48" - 6"
7414-254	2-F24T5HO	12" - 48" - 6"
7422-414/2	4-F14T5	24" - 24" - 6"
7422-424/2	4-F24T5HO	24" - 24" - 6"
7424-428/2	4-F28T5	24" - 48" - 4"
7424-454/1	4-F54T5HO	24" - 48" - 4"
7414-228-FL	2-F28T5	12" - 48 1/4" - 5 1/8"
7414-254-FL	2-F24T5HO	12" - 48 1/4" - 5 1/8"
7422-414/2-FL	4-F14T5	24" - 24 1/4" - 5 1/8"
7422-424/2-FL	4-F24T5HO	24" - 24 1/4" - 5 1/8"
7422-428/2-FL	4-F28T5	24" - 48 1/4" - 5 1/8"
7424-454/1-FL	4-F54T5HO	24" - 48 1/4" - 5 1/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- P1 (1/2 Parabolic Louver)
- Deep Cell configurations available, contact factory

- P2 (1 1/2 Parabolic Louver)
- RFLR (Energy Saving Reflector)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)



RDI SIDE BASKET TROFFER • 5700 SERIES

An attractive and contemporary recessed fixture that provides soft, balanced illumination for a comfortable and appealing light environment. Side mounting of lamps allows for a unique appearance with no visible glare.


Item #	Lamps	W-L-D
5722-240	2-F40BX	23 13/16" - 24" - 5 1/2"
5722-424/2	4-F24T5HO	23 13/16" - 24" - 5 1/2"
5724-428/2	4-F28T5	23 13/16" - 48" - 5 1/2"
5724-454/1	4-F54T5HO	23 13/16" - 48" - 5 1/2"



5724-428/2

OPTIONS*

- EMR (Emergency Ballast)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)



RDI CENTER BASKET TROFFER • 5900 SERIES

An attractive and contemporary recessed fixture that provides soft, balanced illumination for a comfortable and appealing light environment.

T5 Lamps		
Item #	Lamps	W-L-D
5922-114	1-F14T5	23 3/4" - 24" - 5 1/2"
5922-214	2-F14T5	23 3/4" - 24" - 5 1/2"
5922-314/2	3-F14T5	23 3/4" - 24" - 5 1/2"
5922-124	1-F24T5HO	23 3/4" - 24" - 5 1/2"
5922-224	2-F24T5HO	23 3/4" - 24" - 5 1/2"
5922-324/1	3-F24T5HO	23 3/4" - 24" - 5 1/2"
5924-128	1-F28T5	23 3/4" - 48" - 5 1/2"
5924-228	2-F28T5	23 3/4" - 48" - 5 1/2"
5924-328/2	3-F28T5	23 3/4" - 48" - 5 1/2"
5924-154	1-F54T5HO	23 3/4" - 48" - 5 1/2"
5924-254	2-F54T5HO	23 3/4" - 48" - 5 1/2"
5924-354/1	3-F54T5HO	23 3/4" - 48" - 5 1/2"


T8 Lamps		
Item #	Lamps	W-L-D
5922-140	1-F40BX	23 13/16" - 24" - 5 1/2"
5922-240	2-F40BX	23 13/16" - 24" - 5 1/2"
5922-340	3-F40BX	23 13/16" - 24" - 5 1/2"
5924-132	1-F32T8	23 13/16" - 48" - 5 1/2"
5924-232	2-F32T8	23 13/16" - 48" - 5 1/2"
5924-332/1	3-F32T8	23 13/16" - 48" - 5 1/2"
5924-332/2	3-F32T8	23 13/16" - 48" - 5 1/2"



5922-240

OPTIONS*

- EMR (Emergency Ballast)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)




RDI CENTER BASKET WITH BAFFLE • 9500 SERIES

Recessed fixture with radius and perforated metal diffuser for indirect light, as well as louvers along the center for ample direct light.



9524-332/1

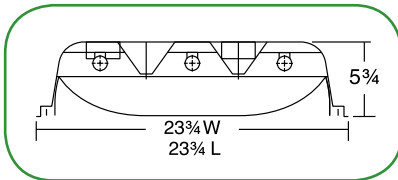

T8 Lamps		
Item #	Lamps	W-L-D
9522-117	1-F17T8	23 3/4" - 24" - 5 3/4"
9522-217	2-F17T8	23 3/4" - 24" - 5 3/4"
9522-317/1	3-F17T8	23 3/4" - 24" - 5 3/4"
9524-132	1-F32T8	23 3/4" - 48" - 5 3/4"
9524-232	2-F32T8	23 3/4" - 48" - 5 3/4"
9524-332/1	3-F32T8	23 3/4" - 48" - 5 3/4"

T5 Lamps		
Item #	Lamps	W-L-D
9522-114	1-F14T5	23 3/4" - 24" - 5 3/4"
9522-214	2-F14T5	23 3/4" - 24" - 5 3/4"
9522-314/2	3-F14T5	23 3/4" - 24" - 5 3/4"
9522-124	1-F24T5HO	23 3/4" - 24" - 5 3/4"
9522-224	2-F24T5HO	23 3/4" - 24" - 5 3/4"
9522-324/2	3-F24T5HO	23 3/4" - 24" - 5 3/4"
9524-128	1-F28T5	23 3/4" - 48" - 5 3/4"
9524-228	2-F28T5	23 3/4" - 48" - 5 3/4"
9524-328/2	3-F28T5	23 3/4" - 48" - 5 3/4"
9524-154	1-F54T5HO	23 3/4" - 48" - 5 3/4"
9524-254	2-F54T5HO	23 3/4" - 48" - 5 3/4"
9524-354/1	3-F54T5HO	23 3/4" - 48" - 5 3/4"

OPTIONS*


- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WL (GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

SOLID OAK SURFACE MOUNT • 1100 SERIES

Hand crafted solid oak frame in your choice of finishes. Smooth white acrylic diffuser for soft, uniform illumination with crown molding and/or lattice options.



1122-232-40
Finish codes, see pg. 42



T8 Lamps		
Item #	Lamps	W-L-D
1112-217	2-F17T8	13" - 25" - 5 1/4"
1114-232	2-F32T8	13" - 49" - 5 1/4"
1136-225	2-F25T8	13" - 38" - 5 1/4"
1117-432/1	4-F32T8	17" - 49" - 5 1/4"
1117-432/2	4-F32T8	17" - 49" - 5 1/4"
1118-232T/1	4-F32T8	13" - 96" - 5 1/4"
1118-232T/2	4-F32T8	13" - 96" - 5 1/4"
1122-232	2-F32T8-U6	25" - 25" - 5 1/4"
1124-432T/1	4-F32T8	25" - 49" - 5 1/4"
1124-432/2	4-F32T8	25" - 49" - 5 1/4"
1172-225T/1	4-F25T8	13" - 74" - 5 1/4"
1172-225T/2	4-F25T8	13" - 74" - 5 1/4"
1173-425T/2	8-F25T8	17" - 74" - 5 1/4"
1173-425T/4	8-F25T8	17" - 74" - 5 1/4"
1128-432T/1	8-F32T8	17" - 96" - 5 1/4"

T8 Lamps		
Item #	Lamps	W-L-D
1144-632/2	6-F32T8	49" - 49" - 5 1/4"
1144-632/3	6-F32T8	49" - 49" - 5 1/4"
1145-832/2	8-F32T8	49" - 49" - 5 1/4"
1145-832/3	8-F32T8	49" - 49" - 5 1/4"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- CM (Crown Molding)
- LAT (Lattice)
- PA (Prismatic Acrylic Diffuser)
- WL (GE Lamps Installed)
- UNV (120/277 volt)
- 277 (277 volt)
- DHS (Daylight Harvesting)

SOLID OAK WITH DROPPED DIFFUSER • 1300 SERIES

Hand crafted solid oak frame in your choice of finishes. Smooth white acrylic dropped diffuser for soft, uniform illumination. Crown molding available as an option.

T8 Lamps		
Item #	Lamps	W-L-D
1314-232	2-F32T8	13" - 49" - 6 1/4"
1317-432/1	4-F32T8	17" - 49" - 6 1/4"
1317-432/2	4-F32T8	17" - 49" - 6 1/4"
1322-232-U6	2-F32T8U6	25" - 25" - 6 1/4"
1324-432/1	4-F32T8	25" - 49" - 6 1/4"
1324-432/2	4-F32T8	25" - 49" - 6 1/4"




1314-232-50

Finish codes, see pg. 42

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- CM (Crown Molding)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

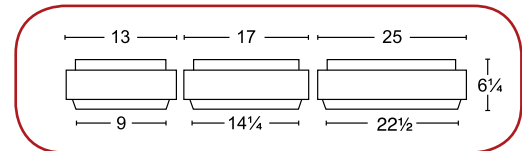

SOLID OAK DECORATIVE SURFACE MOUNT • 6700 SERIES

Hand crafted solid oak frame in your choice of finishes. Available with lattice and/or crown molding options. Smooth white acrylic diffuser for soft, uniform illumination.

OPTIONS*


- CM (Crown Molding)
- LAT (Lattice)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

Item #	Lamps	W-L-D
6713Q-EL	1-F13DBX4P	12" - 12" - 3 1/8"
6718Q-EL	1-F18DBX4P	12" - 12" - 3 1/8"
6722-EL	1-FC8T9	12" - 12" - 3 1/8"
67213Q-EL	2-F13DBX4P	15" - 15" - 3 1/8"
6732-EL	1-FC12T9	
67218Q-EL	2-F18DBX4P	15" - 15" - 3 1/8"
67313Q-EL	3-F13DBX4P	15" - 15" - 3 1/8"
67226Q-EL	2-F26DBX4P	15" - 15" - 3 1/8"
6754-EL	1-FC12T9	15" - 15" - 3 1/8"
	1-FC8T9	
67318Q-EL	3-F18DBX4P	20" - 20" - 3 1/8"
6772-EL	1-FC12T9	20" - 20" - 3 1/8"
	1-FC16T9	



6722-EL-60

Finish codes, see pg. 42




*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

STEEL SIDED SURFACE MOUNT • 5500 SERIES

Made with solid steel sides and finished in baked white enamel with white acrylic diffuser and equipped with metal hinged door frame for quick and easy maintenance.



5524-432/1



T8 Lamps		
Item #	Lamps	W-L-D
5512-217	2-F17T8	12 1/2" - 24" - 3 1/2"
5514-232	2-F32T8	12 1/2" - 48" - 3 1/2"
5522-232	2-F32T8U-6	24 7/16" - 24" - 3 1/2"
5524-432/1	4-F32T8	24 7/16" - 48" - 3 1/2"
5524-432/2	4-F32T8	24 7/16" - 48" - 3 1/2"
5544-632/2	6-F32T8	49 1/8" - 49 1/2" - 4"
5544-632/3	6-F32T8	49 1/8" - 49 1/2" - 4"
5545-832/2	8-F32T8	49 1/8" - 49 1/2" - 4"
5545-832/4	8-F32T8	49 1/8" - 49 1/2" - 4"

T5 Lamps		
Item #	Lamps	W-L-D
5512-214	2-F14T5	12 1/2" - 24" - 3 1/2"
5512-224	2-F24T5HO	12 1/2" - 24" - 3 1/2"
5514-228	2-F28T5	12 1/2" - 48" - 3 1/2"
5514-254	2-F54T5HO	12 1/2" - 48" - 3 1/2"
5522-414/2	4-F14T5	24 7/16" - 24" - 3 1/2"
5522-424/2	4-F24T5HO	24 7/16" - 24" - 3 1/2"
5524-428/2	4-F28T5	24 7/16" - 48" - 3 1/2"
5524-454/1	4-F54T5HO	24 7/16" - 48" - 3 1/2"
5544-628/3	6-F28T5	49 1/8" - 49 1/2" - 4"
5544-654/2	6-F54T5HO	49 1/8" - 49 1/2" - 4"
5545-828/4	8-F28T5	49 1/8" - 49 1/2" - 4"
5545-854/2	8-F54T5HO	49 1/8" - 49 1/2" - 4"

OPTIONS*


- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- DWA (Drop White Acrylic Diffuser)
- PA (Prismatic Acrylic)
- P1 (1/2 Parabolic Louver)
- P2 (1 1/2 Parabolic Louver)
- WL (GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

SQUARE EDGED CLOUD • 5100 SERIES

Contemporary design with squared edges for surface mounted applications.



5124-432/1



T8 Lamps		
Item #	Lamps	W-L-D
5112-217	2-F17T8	14" - 26" - 5"
5114-232	2-F32T8	14" - 50" - 5"
5122-232	2-F32T8U-6	26" - 26" - 5"
5124-432/1	4-F32T8	26" - 50" - 5"
5124-432/2	4-F32T8	26" - 50" - 5"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- BLK (Black Housing)
- WL (GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

T5 Lamps		
Item #	Lamps	W-L-D
5112-214	2-F14T5	14" - 26" - 5"
5112-224	2-F24T5HO	14" - 26" - 5"
5114-228	2-F28T5	14" - 50" - 5"
5114-254	2-F54T5HO	14" - 50" - 5"
5122-414/2	4-F14T5	26" - 26" - 5"
5122-424/2	4-F24T5HO	26" - 26" - 5"
5124-428/2	4-F28T5	26" - 50" - 5"
5124-454/1	4-F54T5HO	26" - 50" - 5"

DECORATIVE SQUARE EDGED CLOUD • 5000 SERIES

Contemporary design with nickel finish for surface mounted applications. Also available in other finish options.

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- BLK (Black Housing)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

T8 Lamps


Item #	Lamps	W-L-D
5012-217	2-F17T8	14" - 26" - 5"
5014-232	2-F32T8	14" - 50" - 5"
5022-232	2-F32T8U-6	26" - 26" - 5"
5024-432/1	4-F32T8	26" - 50" - 5"
5024-432/2	4-F32T8	26" - 50" - 5"

T5 Lamps

Item #	Lamps	W-L-D
5012-214	2-F14T5	14" - 26" - 5"
5012-224	2-F24T5H0	14" - 26" - 5"
5014-228	2-F28T5	14" - 50" - 5"
5014-254	2-F54T5H0	14" - 50" - 5"
5022-414/2	4-F14T5	26" - 26" - 5"
5022-424/2	4-F24T5H0	26" - 26" - 5"
5024-428/2	4-F28T5	26" - 50" - 5"
5024-454/1	4-F54T5H0	26" - 50" - 5"



5024-432/1-NKL
Finish codes, see pg. 42

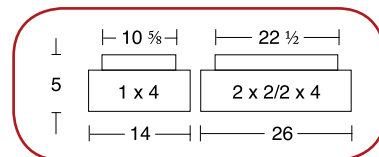

TRADITIONAL CLOUD • 5200 SERIES

White acrylic diffuser with rounded edges which create soft uniform illumination.

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- BLK (Black Housing)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

T8 Lamps


Item #	Lamps	W-L-D
5213-232	2-F32T8	12" - 51" - 6"
5214-232	2-F32T8	15" - 51 1/4" - 6"
5217-432/1	4-F32T8	16 1/2" - 51" - 6"
5217-432/2	4-F32T8	16 1/2" - 51" - 6"
5221-417/1	4-F17T8	16 1/2" - 27 1/4" - 6"
5221-417/2	4-F17T8	16 1/2" - 27 1/4" - 6"
5222-232	2-F32T8U-6	27" - 27 1/4" - 6"
5224-432/1	4-F32T8	27" - 51 1/4" - 6"
5224-432/2	4-F32T8	27" - 51 1/4" - 6"

T5 Lamps

Item #	Lamps	W-L-D
5214-228	2-F28T5	15" - 51 1/4" - 6"
5214-254	2-F54T5H0	15" - 51 1/4" - 6"
5222-414/2	4-F14T5	27" - 27 1/4" - 6"
5222-424/2	4-F24T5H0	27" - 27 1/4" - 6"
5224-428/2	4-F28T5	27" - 51 1/4" - 6"
5224-454/1	4-F54T5H0	27" - 51 1/4" - 6"



5224-432/1

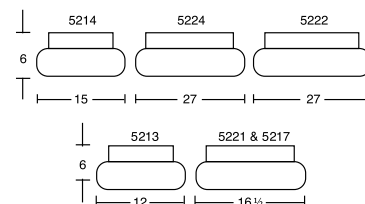


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

STEP CLOUD • 5300 SERIES

A modern cloud light with a stepped white acrylic diffuser.



5313-232

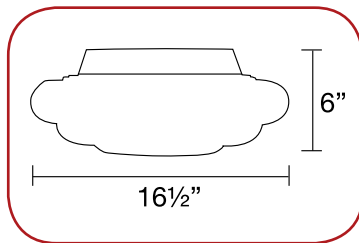

T8 Lamps		
Item #	Lamps	W-L-D
5313-232	2-F32T8	12" - 51" - 6"
5317-432/1	4-F32T8	16 1/2" - 51" - 6"
5317-432/2	4-F32T8	16 1/2" - 51" - 6"
5321-417/1	4-F17T8	16 1/2" - 27 1/4" - 6"
5321-417/2	4-F17T8	16 1/2" - 27 1/4" - 6"

OPTIONS*


- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- BLK (Black Housing)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

DECORATIVE SQUARE PUFF • 6800 SERIES

Square diffuser and extremely shallow housing allows maximum light output with minimum energy usage. The low profile design allows for various mounting angles. Suitable for ceiling or wall mount.



6832-EL

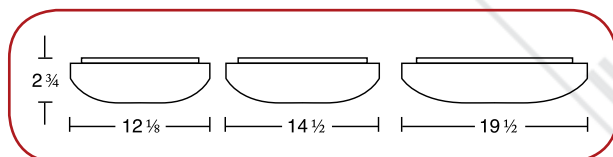

Item #	Lamps	W-L-D
6813Q-EL	1-F13DBX4P	12 1/8" - 12 1/8" - 2 3/4"
6818Q-EL	1-F18DBX4P	12 1/8" - 12 1/8" - 2 3/4"
6822-EL	1-FC8T9	12 1/8" - 12 1/8" - 2 3/4"
68213Q-EL	2-F13DBX4P	14 1/2" - 14 1/2" - 2 3/4"
6832-EL	1-FC12T9	14 1/2" - 14 1/2" - 2 3/4"
68218Q-EL	2-F18DBX4P	14 1/2" - 14 1/2" - 2 3/4"
68313Q-EL	3-F13DBX4P	14 1/2" - 14 1/2" - 2 3/4"
6854-EL	1-FC8T9	14 1/2" - 14 1/2" - 2 3/4"
	1-FC12T9	
6872-EL	1-FC12T9	19 1/2" - 19 1/2" - 2 3/4"
	1-FC16T9	

OPTIONS*

- WL ( GE Lamps Installed)
- UNV (120/277 volt)
- LED (Light-Emitting Diode)

STEEL WRAPAROUND • 5600 SERIES

Baked white enamel steel wraparound with extruded prismatic acrylic diffuser. Also available in a variety of wood finish ends for those decorative applications.

T5 Lamps		
Item #	Lamps	W-L-D
5624-214	2-F14T5	11 5/16" - 24" - 3 3/8"
5624-224	2-F24T5H0	11 5/16" - 24" - 3 3/8"
5625-414/2	4-F14T5	16" - 24" - 3 3/8"
5625-424/2	4-F24T5H0	16" - 24" - 3 3/8"
5636-221	2-F21T5	11 5/16" - 36" - 3 3/8"
5636-239	2-F39T5H0	11 5/16" - 36" - 3 3/8"
5637-421/2	4-F21T5	16" - 36" - 3 3/8"
5637-439/2	4-F39T5H0	16" - 36" - 3 3/8"
5648-228	2-F28T5	11 5/16" - 48" - 3 3/8"
5648-254	2-F54T5H0	11 5/16" - 48" - 3 3/8"
5649-428/2	4-F28T5	16" - 48" - 3 3/8"
5649-454/1	4-F54T5H0	16" - 48" - 3 3/8"


OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- WE (Wood Ends)

T8 Lamps		
Item #	Lamps	W-L-D
5623-217	2-F17T8	9 1/4" - 24" - 3 3/8"
5624-217	2-F17T8	11 5/16" - 24" - 3 3/8"
5625-417/1	4-F17T8	16" - 24" - 3 3/8"
5625-417/2	4-F17T8	16" - 24" - 3 3/8"
5636-225	2-F25T8	11 5/16" - 36" - 3 3/8"
5637-425/1	4-F25T8	16" - 36" - 3 3/8"
5637-425/2	4-F25T8	16" - 36" - 3 3/8"
5647-232	2-F32T8	9 1/4" - 48" - 3 3/8"
5648-232	2-F32T8	11 5/16" - 48" - 3 3/8"
5649-432/1	4-F32T8	16" - 48" - 3 3/8"
5649-432/2	4-F32T8	16" - 48" - 3 3/8"
5672-225/1	4-F25T8	11 5/16" - 72" - 3 3/8"
5672-225/2	4-F25T8	11 5/16" - 72" - 3 3/8"
5673-425/1/2	8-F25T8	16" - 72" - 3 3/8"
5673-425/1/4	8-F25T8	16" - 72" - 3 3/8"
5696-232/1	4-F32T8	11 5/16" - 96" - 3 3/8"
5696-232/2	4-F32T8	11 5/16" - 96" - 3 3/8"
5697-432/1/2	8-F32T8	16" - 96" - 3 3/8"
5697-432/1/4	8-F32T8	16" - 96" - 3 3/8"



5647-232
Wood finish codes, see pg. 42

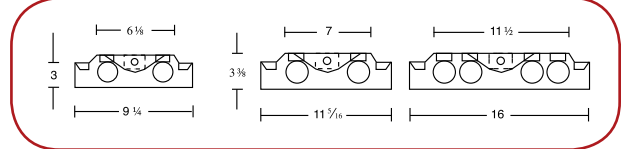

DECORATIVE THIN PROFILE WRAPAROUND • 25700 SERIES

Low profile wraparound with extruded white acrylic diffuser. Comes standard with white ends. A variety of colored end options are available for an added decorative touch.


T8 Lamps		
Item #	Lamps	W-L-D
25712-217	2-F17T8	11 9/16" - 29 7/8" - 2 3/4"
25713-232	2-F32T8	11 9/16" - 53 7/8" - 2 3/4"
25717-432/1	4-F32T8	17" - 53 7/8" - 3 5/16"
25717-432/2	4-F32T8	17" - 53 7/8" - 3 5/16"
25721-417/1	4-F17T8	17" - 29 7/8" - 3 5/16"
25721-417/2	4-F17T8	17" - 29 7/8" - 3 5/16"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)



25713-232-10
Finish codes, see pg. 42




*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

DIRECT INDIRECT LINEAR BASKET • 6300 SERIES

Contemporary surface mount steel fixture finished in bright white to blend in with almost any office, lobby or public area. Sloping reflector helps create a uniform light spread.



6348-228

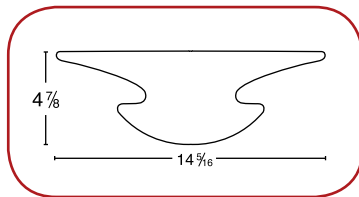

T8 Lamps		
Item #	Lamps	W-L-D
6348-132	1-F32T8	23 13/16" - 24" - 5 1/2"
6348-232	2-F32T8	23 13/16" - 24" - 5 1/2"

T5 Lamps		
Item #	Lamps	W-L-D
6348-128	1-F28T5	23 13/16" - 24" - 5 1/2"
6348-228	2-F28T5	23 13/16" - 24" - 5 1/2"
6348-154	1-F54T5HO	23 13/16" - 24" - 5 1/2"
6348-254	2-F54T5HO	23 13/16" - 24" - 5 1/2"

OPTIONS*


- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)

ENCLOSED MUSHROOM • 7100 SERIES

Decorative mushroom shaped puff fixture with white acrylic lens for soft, glare free illumination. Suitable for ceiling or wall mount. Comes standard with lamps installed.



71213Q-EL

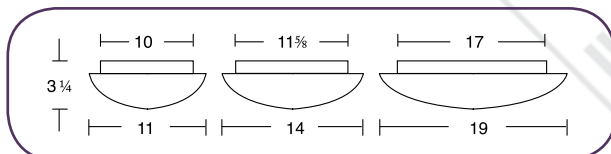

Item #	Lamps	W-L-D
7113QEL	1-F13DBX4P	11" - 11" - 3 1/4"
7118QEL	1-F18DBX4P	11" - 11" - 3 1/4"
7122-EL	1-FC8T9	11" - 11" - 3 1/4"
71213Q-EL	2-F13DBX4P	11" - 11" - 3 1/4"
71126Q-EL	1-26DBX4P	11" - 11" - 3 1/4"
7132-EL	1-FC12T9	14" - 14" - 3 1/4"
71218Q-EL	2-F18DBX4P	14" - 14" - 3 1/4"
71313Q-EL	3-F13DBX4P	14" - 14" - 3 1/4"
7154-EL	1-FC8T9	14" - 14" - 3 1/4"
	1-FC12T9	
71226Q-EL	2-F26DBX4P	19" - 19" - 3 1/4"
71318Q-EL	3-F18DBX4P	19" - 19" - 3 1/4"
7172-EL	1-FC12T9	19" - 19" - 3 1/4"
	1-FC16T9	

OPTIONS*

- EMR (Emergency Ballast)
Only available on 14" and 19"
- UNV (120/277 volt)
- LED (Light-Emitting Diode)

ENCLOSED DRUM • 7200 SERIES

Enclosed drum fixture with white acrylic lens for soft, glare free illumination. Suitable for either ceiling wall mount. Comes standard with lamps installed.


OPTIONS*

- EMR (Emergency Ballast)
Only available on 14" and 19"
- UNV (120/277 volt)
- LED (Light-Emitting Diode)

Item #	Lamps	W-L-D
72130EL	1-F13DBX4P	11" - 11" - 3 1/4"
72180EL	1-F18DBX4P	11" - 11" - 3 1/4"
7222-EL	1-FC8T9	11" - 11" - 3 1/4"
72213Q-EL	2-F13DBX4P	11" - 11" - 3 1/4"
72126Q-EL	1-26DBX4P	11" - 11" - 3 1/4"
7232-EL	1-FC12T9	14" - 14" - 3 1/4"
72218Q-EL	2-F18DBX4P	11" - 11" - 3 1/4"
72313Q-EL	3-F13DBX4P	14" - 14" - 3 1/4"
72226Q-EL	2-F26DBX4P	19" - 19" - 3 1/4"
7254-EL	1-FC8T9	14" - 14" - 3 1/4"
	1-FC12T9	
72318Q-EL	3-F18DBX4P	19" - 19" - 3 1/4"
7272-EL	1-FC12T9	19" - 19" - 3 1/4"
	1-FC16T9	



7222-EL

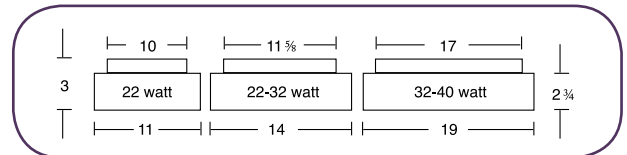


DECORATIVE NICKEL TRIM SURFACE MOUNT • 7300 SERIES

Decorative double trimmed nickel fixture with acrylic lens for soft glare free illumination. Suitable for ceiling or wall mount. Comes standard with lamps included.

Item #	Lamps	W-L-D
73213G	2-13GU24	10" - 10" - 3 1/2"
7322-EL	1-FC8T9	10" - 10" - 3 1/2"
73218G-14"	2-18GU24	14 3/4" - 14 3/4" - 4 3/4"
7332-EL	1-FC12T9	14 3/4" - 14 3/4" - 4 3/4"
73218G-16"	2-18GU24	16 1/4" - 16 1/4" - 5"
7354-EL	1-FC8T9	16 1/4" - 16 1/4" - 5"
	1-FC12T9	
73418G	4-18GU24	18" - 18" - 4 1/2"
7372-EL	1-FC12T9	18" - 18" - 4 1/2"
	1-FC16T9	



7322-EL

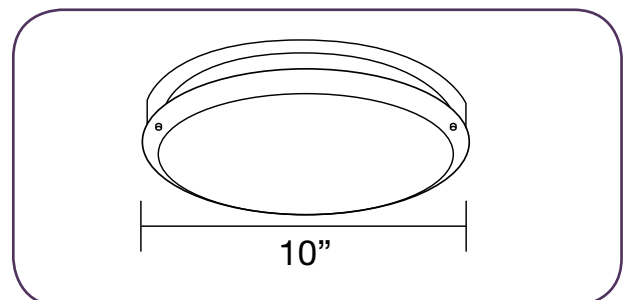


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

DECORATIVE LOW PROFILE SAUCER • 2000 SERIES

Decorative saucer fixture with white acrylic lens for soft, glare free illumination. Suitable for either ceiling or wall mount.



20213Q-EL-WHT-20



FINISH CODES

- BRS (Brass)
- NKL (Nickel)

LENS CODES

- 10 (Clear Prismatic Acrylic)
- 20 (Smooth Opal Acrylic)

OPTIONS*

- WL ( GE Lamps Installed)
- UNV (120/277 volt)
- LED (Light-Emitting Diode)

Item #	Lamps	W-L-D
2013Q-EL	1-F13DBX4P	12 3/4" - 12 3/4" - 3 1/2"
2018Q-EL	1-F18DBX4P	12 3/4" - 12 3/4" - 3 1/2"
2022-EL	1-FC8T9	12 3/4" - 12 3/4" - 3 1/2"
20213Q-EL	2-F13DBX4P	12 3/4" - 12 3/4" - 3 1/2"
2032-EL	1-FC12T9	16 3/4" - 16 3/4" - 3 1/2"
20218Q-EL	2-F18DBX4P	16 3/4" - 16 3/4" - 3 1/2"
20313-EL	3-F13DBX4P	16 3/4" - 16 3/4" - 3 1/2"
2054-EL	1-FC8T9	16 3/4" - 16 3/4" - 3 1/2"
	1-FC12T9	
20318Q-EL	3-F18DBX4P	20 3/4" - 20 3/4" - 3 1/2"
2072-EL	1-FC12T9	20 3/4" - 20 3/4" - 3 1/2"
	1-FC16T9	

DECORATIVE ROUND WITH FINIAL • 21000 SERIES

Surface mount round fixture with Alabaster swirl glass and finial with lamps included.



21218Q-EL-BRN




21218Q-EL-WHT

Item #	Lamps	Dimensions
21218Q-EL-BRN	2-F18DBX4P	13" - 4 5/8"
21218Q-EL-WHT	2-F18DBX4P	13" - 4 5/8"

OPTIONS*

- LED (Light-Emitting Diode)

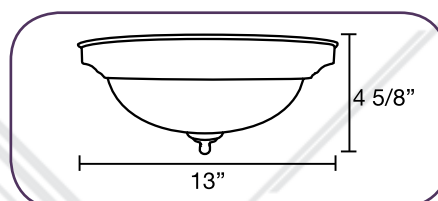


DECORATIVE ROUND CIRCLE • 22000 SERIES

Surface mount round fixture with flat opaque glass. Lamps included.

Item #	Lamps	Dimensions
22218Q-EL-NKL	2-F18DBX4P	13" - 4 5/8"
22218Q-EL-WHT	2-F18DBX4P	13" - 4 5/8"

OPTIONS*

- LED (Light-Emitting Diode)

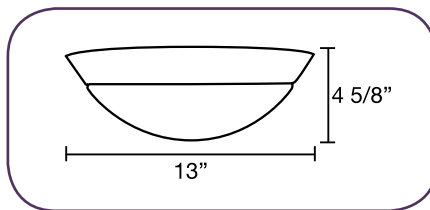

22218Q-EL-NKL



22218Q-EL-WHT

ACRYLIC INDUSTRIAL STRIP • 6600 SERIES

A modern design that utilizes both acrylic and metal reflector technology for exceptional performance coming from both direct and indirect light. This unique design is ideal for low to mid hang heights and can be ordered in a wide variety of configurations.

T8 Lamps		
Item #	Lamps	W-L-D
6648-232	2-F32T8	9 3/8" - 48" - 3 7/8"
6696-232T/1	4-F32T8	9 3/8" - 96" - 3 7/8"
6696-232T/2	4-F32T8	9 3/8" - 96" - 3 7/8"


T5 Lamps		
Item #	Lamps	W-L-D
6648-254	2-F54T5HO	9 3/8" - 48" - 3 7/8"
6696-254T/1	4-F54T5HO	9 3/8" - 96" - 3 7/8"
6696-254T/2	4-F54T5HO	9 3/8" - 96" - 3 7/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WL (3 GE Lamps Installed)
- WLCG (3 GE Covrguard Shatter Resistant Lamps)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- 277 (277 volt)
- UNV (120/277 volt)



6648-232




*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUSTRIAL STRIP WITH REFLECTOR • 8600 SERIES

Our industrial strip is equipped with a Steel reflector and the body is finished in baked white enamel. May be mounted individually or in continuous rows.



8648-232

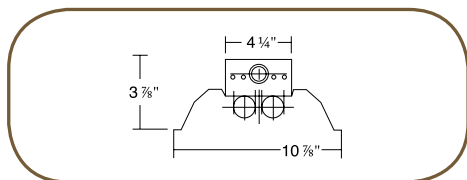

T8 Lamps		
Item #	Lamps	W-L-D
8624-217	2-F17T8	10 7/8" - 24" - 3 7/8"
8648-232	2-F32T8	10 7/8" - 48" - 3 7/8"
8696-232T/1	4-F32T8	10 7/8" - 96" - 3 7/8"
8696-232T/2	4-F32T8	10 7/8" - 96" - 3 7/8"
8696-T8-EL	2-F96T8	10 7/8" - 96" - 3 7/8"
8696-T12-EL	2-F96T12	10 7/8" - 96" - 3 7/8"
8696-T8-EL-HO	2-F96T8HO	10 7/8" - 96" - 4 3/4"
8696-T12-EL-HO	2-F96T12HO	10 7/8" - 96" - 4 3/4"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WG (Wireguard)
- WL (3 GE Lamps Installed)
- WLCG (3 GE Covrguard Shatter Resistant Lamps)
- 277 (277 volt)
- UNV (120/277 volt)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)

T5 Lamps		
Item #	Lamps	W-L-D
8624-214	2-F14T5	10 7/8" - 24" - 3 7/8"
8624-224	2-F24T5HO	10 7/8" - 24" - 3 7/8"
8648-228	2-F28T5	10 7/8" - 48" - 3 7/8"
8648-254	2-F54T5HO	10 7/8" - 48" - 3 7/8"
8696-228T/2	4-F28T5	10 7/8" - 96" - 3 7/8"
8696-254T/1	4-F54T5HO	10 7/8" - 96" - 3 7/8"

NARROW STRIP T8 • 8200 SERIES


Our narrow body strip fixture is available in a large variety of configurations and may be mounted individually or in continuous rows.



8236-125

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WL (3 GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- WG (Wireguard)
- WLCG (3 GE Covrguard Shatter Resistant Lamps)



T8 Lamps		
Item #	Lamps	W-L-D
8218-EL	1-F15T8	3 1/8" - 18" - 3"
8224-117	1-F17T8	3 1/8" - 24" - 3"
8224-217	2-F17T8	3 1/8" - 24" - 3"
8236-125	1-F25T8	3 1/8" - 36" - 3"
8236-225	2-F25T8	3 1/8" - 36" - 3"
8248-132	1-F32T8	3 1/8" - 48" - 3"
8248-232	2-F32T8	3 1/8" - 48" - 3"
8272-125T/1	2-F25T8	3 1/8" - 72" - 3"
8272-225T/1	4-F25T8	3 1/8" - 72" - 3"
8272-225T/2	4-F25T8	3 1/8" - 72" - 3"
8284-EL	1-F25T8	3 1/8" - 84" - 3"
	1-F32T8	
8296-132T/1	2-F32T8	3 1/8" - 96" - 3"
8296-232T/1	4-F32T8	3 1/8" - 96" - 3"
8296-232T/2	4-F32T8	3 1/8" - 96" - 3"

T5 Lamps		
Item #	Lamps	W-L-D
8224-114	1-F14T5	3 1/8" - 24" - 3"
8224-214	2-F14T5	3 1/8" - 24" - 3"
8224-124	1-F24T5HO	3 1/8" - 24" - 3"
8224-224	2-F24T5HO	3 1/8" - 24" - 3"
8236-121	1-F21T5	3 1/8" - 36" - 3"
8236-221	2-F21T5	3 1/8" - 36" - 3"
8236-139	1-F39T5HO	3 1/8" - 36" - 3"
8236-239	2-F39T5HO	3 1/8" - 36" - 3"
8248-128	1-F28T5	3 1/8" - 48" - 3"
8248-228	2-F28T5	3 1/8" - 48" - 3"
8248-154	1-F54T5HO	3 1/8" - 48" - 3"
8248-254	2-F54T5HO	3 1/8" - 48" - 3"
8296-128T/2	2-F28T5	3 1/8" - 96" - 3"
8296-228T/2	4-F28T5	3 1/8" - 96" - 3"
8296-154T/1	2-F54T5HO	3 1/8" - 96" - 3"
8296-254T/1	4-F54T5HO	3 1/8" - 96" - 3"

TWO LAMP STRIP T8 • 8500 SERIES

Wider than our 8200 Series fixture, this strip fixture is available in a large variety of configurations from two to four lamps and may be mounted individually or in continuous rows.

T5 Lamps		
Item #	Lamps	W-L-D
8524-214	2-F14T5	4 1/2" - 24" - 3 9/16"
8524-224	2-F24T5HO	4 1/2" - 24" - 3 9/16"
8536-221	2-F21T5	4 1/2" - 36" - 3 9/16"
8536-239	2-F39T5HO	4 1/2" - 36" - 3 9/16"
8548-228	2-F28T5	4 1/2" - 48" - 3 9/16"
8548-254	2-F54T5HO	4 1/2" - 48" - 3 9/16"
8596-228T/2	4-F28T5	4 1/2" - 96" - 3 9/16"
8596-254T/1	4-F54T5HO	4 1/2" - 96" - 3 9/16"


OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WG (Wireguard)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)
- 277 (277 volt)
- UNV (120/277 volt)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)

T8 Lamps		
Item #	Lamps	W-L-D
8518-EL	2-F15T8	4 1/2" - 18" - 3 9/16"
8524-217	2-F17T8	4 1/2" - 24" - 3 9/16"
8536-225	2-F25T8	4 1/2" - 36" - 3 9/16"
8548-232	2-F32T8	4 1/2" - 48" - 3 9/16"
8572-225T/1	4-F25T8	4 1/2" - 72" - 3 9/16"
8572-225T/2	4-F25T8	4 1/2" - 72" - 3 9/16"
8596-232T/1	4-F32T8	4 1/2" - 96" - 3 9/16"
8596-232T/2	4-F32T8	4 1/2" - 96" - 3 9/16"
8596-T8-EL	2-F96T8	4 1/2" - 96" - 3 9/16"
8596-EL-T12	2-F96T12	4 1/2" - 96" - 3 9/16"
8596-T8-EL-HO	2-F96T8HO	4 1/2" - 96" - 3 9/16"
8596-T12-EL-HO	2-F96T12HO	4 1/2" - 96" - 3 9/16"



8548-232



MINI STRIP T8 OR T5 • 8100 SERIES

A miniature strip finished in baked white enamel, fits into the smallest spaces.


T5 / T8 Lamps		
Item #	Lamps	W-L-D
8104-EL	1-F4T5	1 3/8" - 6 1/8" - 2 1/8"
8106-EL	1-F6T5	1 3/8" - 9 1/8" - 2 1/8"
8108-EL	1-F8T5	1 3/8" - 12 1/8" - 2 1/8"
8113-EL	1-F13T5	1 3/8" - 21 1/8" - 2 1/8"
8115-EL	1-F15T8	1 3/8" - 19" - 2 1/8"



8108-EL

OPTIONS*

- PLG (6' SJT Grounded Cord & Plug)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)





*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

COMPACT STRIP T8 OR T5 • 28100 SERIES

A compact T5 or T8 lamp single or double lamp strip is perfect for those tight locations.



28122



T5 Lamps		
Item #	Lamps	W-L-D
28122	1-F14T5	1 3/4" - 22 1/2" - 2 1/2"
28124	1-F24T5HO	1 3/4" - 22 1/2" - 2 1/2"
28134	1-F21T5	1 3/4" - 34 1/2" - 2 1/2"
28139	1-F39T5HO	1 3/4" - 34" - 2 1/2"
28146	1-F28T5	1 3/4" - 46 1/2" - 2 1/2"
28154	1-F54T5HO	1 3/4" - 46" - 2 1/2"
28158	1-F35T5	1 3/4" - 58 1/2" - 2 1/2"
28180	1-F80T5HO	1 3/4" - 58" - 2 1/2"
28192-128T/1	2-F28T5	1 3/4" - 92" - 2 1/2"
28192-154T/1	2-F54T5HO	1 3/4" - 92" - 2 1/2"
281222	2-F14T5	2 1/2" - 22 1/2" - 2 1/2"
281224	2-F24T5HO	2 1/2" - 22" - 2 1/2"
281234	2-F21T5	2 1/2" - 34 1/2" - 2 1/2"
281239	2-F39T5HO	2 1/2" - 34" - 2 1/2"
281246	2-F28T5	2 1/2" - 46 1/2" - 2 1/2"
281254	2-F54T5HO	2 1/2" - 46" - 2 1/2"

T8 Lamps		
Item #	Lamps	W-L-D
28124	1-F17T8	1 3/4" - 24" - 2 1/2"
28136	1-F25T8	1 3/4" - 36" - 2 1/2"
28148	1-F32T8	1 3/4" - 48" - 2 1/2"
28160	1-F40T8	1 3/4" - 60" - 2 1/2"

OPTIONS*


- DIM (Dimming Ballast)
- WL (GE Lamps Installed)
- WLCG (GE CovrGuard Shatter Resistant Lamps)
- PLG (6' SJT Grounded Cord & Plug)
- UNV (120/277 volt)
- 277 (277 volt)

T8 SIDE MOUNT STRIP 1 LAMP • 8300 SERIES

Low profile single lamp side mount strip for limited access areas. Fixture may be mounted individually or in continuous rows.



8348-132



T8 Lamps		
Item #	Lamps	W-L-D
8318-EL	1-F15T8	4 1/2" - 18" - 1 7/8"
8324-117	1-F17T8	4 1/2" - 24" - 1 7/8"
8336-125	1-F25T8	4 1/2" - 36" - 1 7/8"
8348-132	1-F32T8	4 1/2" - 48" - 1 7/8"
8372-125T	2-F25T8	4 1/2" - 72" - 1 7/8"
8396-132T	2-F32T8	4 1/2" - 96" - 1 7/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- WL (GE Lamps Installed)
- WLCG (GE CovrGuard Shatter Resistant Lamps)
- 277 (277 volt)
- UNV (120/277 volt)

T5 MINI SIDE MOUNT STRIP 1 LAMP • 28300 SERIES

Miniature single lamp T5 side mount strip for limited access areas. Fixture may be mounted individually or in continuous rows.


T5 Lamps		
Item #	Lamps	W-L-D
28322	1-F14T5	2 3/4" - 22" - 1 5/8"
28324	1-F24T5HO	2 3/4" - 22" - 1 5/8"
28334	1-F21T5	2 3/4" - 34" - 1 5/8"
28339	1-F39T5HO	2 3/4" - 34" - 1 5/8"
28346	1-F28T5	2 3/4" - 46" - 1 5/8"
28354	1-F54T5HO	2 3/4" - 46" - 1 5/8"
28358	1-F35T5	2 3/4" - 58" - 1 5/8"
28380	1-F80T5HO	2 3/4" - 58" - 1 5/8"

OPTIONS*

- DIM (Dimming Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)
- 277 (277 volt)



28154

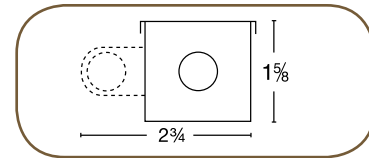

T8 SIDE MOUNT STRIP 2 LAMP • 8400 SERIES

Two lamp side mount strip that can be mounted individually or in continuous rows.


T8 Lamps		
Item #	Lamps	W-L-D
8418-EL	2-F15T8	6 1/4" - 18" - 1 7/8"
8424-217	2-F17T8	6 1/4" - 24" - 1 7/8"
8436-225	2-F25T8	6 1/4" - 36" - 1 7/8"
8448-232	2-F32T8	6 1/4" - 36" - 1 7/8"
8472-225T/1	4-F25T8	6 1/4" - 72" - 1 7/8"
8472-225T/2	4-F25T8	6 1/4" - 72" - 1 7/8"
8496-232T/1	4-F32T8	6 1/4" - 96" - 1 7/8"
8496-232T/2	4-F32T8	6 1/4" - 96" - 1 7/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)
- 277 (277 volt)
- UNV (120/277 volt)



8424-217




T5 MINI SIDE MOUNT STRIP 2 LAMP • 28400 SERIES

Two lamp mini side mount strip for limited access areas. May be mounted individually or in continuous rows.



28434



T5 Lamps		
Item #	Lamps	W-L-D
28422	2-F14T5	3 1/2" - 22" - 1 5/8"
28434	2-F21T5	3 1/2" - 34" - 1 5/8"
28446	2-F28T5	3 1/2" - 46" - 1 5/8"
28458	2-F35T5	3 1/2" - 58" - 1 5/8"
28424	2-F24T5HO	3 1/2" - 22" - 1 5/8"
28439	2-F39T5HO	3 1/2" - 34" - 1 5/8"
28454	2-F54T5HO	3 1/2" - 46" - 1 5/8"
28480	2-F80T5HO	3 1/2" - 58" - 1 5/8"

OPTIONS*


- DIM (Dimming Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- WL (6 GE Lamps Installed)
- WLCG (6 GE CovrGuard Shatter Resistant Lamps)
- 277 (277 volt)

STAGGERED T5 OR T8 COMPACT • 28700

Compact Staggered Strip to help provide an uninterrupted pattern of light with no dark spots between lamp ends. Fixture is open on one end for continuous row mounting.



28722-214

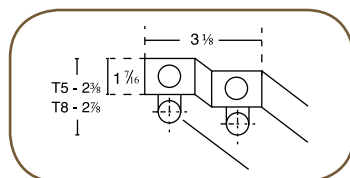

T8 Lamps		
Item #	Lamps	W-L-D
28724-117	1-F17T8	3 1/8" - 26" - 2 3/8"
28724-217	2-F17T8	3 1/8" - 26" - 2 3/8"
28736-125	1-F25T8	3 1/8" - 40" - 2 3/8"
28736-225	2-F28T8	3 1/8" - 40" - 2 3/8"
28748-132	1-F32T8	3 1/8" - 52" - 2 3/8"
28748-232	2-F32T8	3 1/8" - 52" - 2 3/8"
28760-140	1-F40T8	3 1/8" - 64" - 2 3/8"
28760-240	2-F40T8	3 1/8" - 64" - 2 3/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- WL (6 GE Lamps Installed)
- WLCG (6 GE CovrGuard Shatter Resistant Lamps)
- 277 (277 volt)
- UNV (120/277 volt)
- END (For single fixture mounting)

T5 Lamps		
Item #	Lamps	W-L-D
28722-114	1-F14T5	3 1/8" - 24 1/2" - 2 3/8"
28722-214	2-F14T5	3 1/8" - 24 1/2" - 2 3/8"
28722-124	1-F24T5HO	3 1/8" - 24 1/2" - 2 3/8"
28722-224	2-F24T5HO	3 1/8" - 24 1/2" - 2 3/8"
28734-121	1-F21T5	3 1/8" - 38 1/4" - 2 3/8"
28734-221	2-F21T5	3 1/8" - 38 1/4" - 2 3/8"
28734-139	1-F39T5HO	3 1/8" - 38 1/4" - 2 3/8"
28734-239	2-F39T5HO	3 1/8" - 38 1/4" - 2 3/8"
28748-128	1-F28T5	3 1/8" - 50" - 2 3/8"
28748-228	2-F28T5	3 1/8" - 50" - 2 3/8"
28748-154	1-F54T5HO	3 1/8" - 50" - 2 3/8"
28748-254	2-F54T5HO	3 1/8" - 50" - 2 3/8"
28758-135	1-F35T5	3 1/8" - 62" - 2 3/8"
28758-235	2-F35T5	3 1/8" - 62" - 2 3/8"
28780-180	1-F80T5HO	3 1/8" - 62" - 2 3/8"
28780-280	2-F80T5HO	3 1/8" - 62" - 2 3/8"

LED DIMMABLE COVE LIGHT • CL SERIES

Our LED cove lighting system helps create a consistently beautiful look while lowering operating costs and curbing the impact on our environment. This system has dimming capabilities when connected to an electric low voltage reverse phase control dimmer. Suitable for a variety of applications including, casinos, hotels, restaurants and retail stores. This system is rated to perform for 50,000 or more hours.

Electronic			
Item #	Watts	Lumens	Length
CL27	6.5	290	12 3/4"
CL30	6.5	300	12 3/4"
CL41	6.5	320	12 3/4"

Mounting Track		
For specific mounting angles – required for installation		
Item #	Angle	Length
MT-0	0°	48"
MT-15	15°	48"
MT-30	30°	48"




CL27-MT-0

OPTIONS*

- JC (36" Jumper Cable)

Connector Cables	
Leader Cables – required for installation Connects LED to power source	
Item #	Length
CC-480	480"
CC-120	120"



THINCAB • 3000 SERIES

Our 1" thin profile electronic fixture is ideal for under-cabinet applications where space is limited. Finished in baked white enamel with white ribbed acrylic diffuser to provide soft illumination. Comes standard with lamps installed.


T5 Lamps		
Item #	Lamps	W-L-D
3012	1-F8T5	5" - 12 1/4" - 1"
3021	1-F13T5	5" - 21 1/4" - 1"
3024	2-F8T5	5" - 24 1/2" - 1"
3033	1-F8T5	5" - 33 1/2" - 1"
	1-F13T5	
3042	2-F13T5	5" - 42 1/2" - 1"



3021

OPTIONS*

- CO (Convenience Outlet)
- RSW (Rocker Switch)
- PLG (6' SJT Grounded Cord & Plug)
- 277 (277 volt ballast)

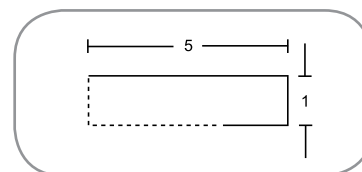


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

CLASSICAB • 3100 SERIES

Designed for kitchen cabinets, display cases, shelves, or any work area that requires task lighting. Finished in baked white enamel with white ribbed acrylic diffuser to provide soft illumination.



3136-125



T5 / T8 Lamps		
Item #	Lamps	W-L-D
3108-EL	1-F8T5	4 1/2" - 12" - 1 1/4"
3118-EL	1-F15T8	5 1/4" - 18" - 1 3/4"
3124-117	1-F17T8	5 1/4" - 24" - 1 3/4"
3136-125	1-F25T8	5 1/4" - 36" - 1 3/4"
3148-132	1-F32T8	5 1/4" - 48" - 1 3/4"

OPTIONS*


- CO (Convenience Outlet)
- RSW (Rocker Switch)
- PLG (6' SJT Grounded Cord & Plug)
- WL (GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)

MINICAB • 3500 SERIES

The 3500 series is our most compact under-cabinet fixture. Finished in baked white enamel with a clear ribbed polycarbonate diffuser for optimal task lighting. Comes standard with lamps installed.



3546



T5 Lamps		
Item #	Lamps	W-L-D
3510	1-F6T5	2 7/16" - 9 1/4" - 1"
3512	1-F8T5	2 7/16" - 12 1/4" - 1"
3521	1-F13T5	2 7/16" - 21 1/4" - 1"
3522	1-F14T5	2 7/16" - 22 1/2" - 1"
3524	2-F8T5	2 7/16" - 24 1/4" - 1"
3533	1-F8T5	2 7/16" - 33 1/2" - 1"
	1-F13T5	
3534	1-F21T5	2 7/16" - 34 1/2" - 1"
3542	2-F13T5	2 7/16" - 42 1/2" - 1"
3546	1-F28T5	2 7/16" - 46 1/2" - 1"

OPTIONS*

- PLG (6' SJT Grounded Cord & Plug)
- RSW (Rocker Switch)
- 277 (277 volt)

LED TUBELITE • TE SERIES

Our LED Tubelite has a full rigid aluminum body heat sink. It has high power SMD LED technology to give consistent color and no dark spots. This is great for under cabinet, cove, accent, retail display and strip lighting. For indoor use.


Electronic Tubelite		
Item #	Lamps	Length
TE05CW	200 lm 5000K	12"
TE05NW	200 lm 4200K	12"
TE05WS	200 lm 3300K	12"
TE05WT	200 lm 2800K	12"
TE10CW	400 lm 5000K	24"
TE10NW	400 lm 4200K	24"
TE10WS	400 lm 3300K	24"
TE10WT	400 lm 2800K	24"
TE15CW	600 lm 5000K	35 1/2"
TE15NW	600 lm 4200K	35 1/2"
TE15WS	600 lm 3300K	35 1/2"
TE15WT	600 lm 2800K	35 1/2"
TE20CW	800 lm 5000K	47"
TE20NW	800 lm 4200K	47"
TE20WS	800 lm 3300K	47"
TE20WT	800 lm 2800K	47"

Drivers	
Item #	Description
GS18	18 Watt 74" Plug in Power Supply
GS25	25 Watt 74" Plug in Power Supply
LSP20	20 Watt Hardwire Power Supply (30" connector required)
LSP40	40 Watt Hardwire Power Supply (30" connector required)
LSP60	60 Watt Hardwire Power Supply (30" connector required)

Connectors	
Item #	Description
308-CC02001-00	10" Jumper Jacks at both ends
TB-030	30" Jack on 1 end-(required when ordering hardwire driver)



TE10WS

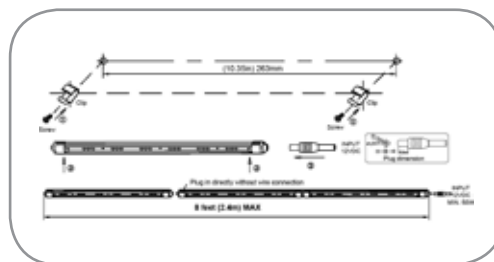

TRADITIONAL ONE LAMP VANITY • 4100 SERIES

Wall mounted fixture with chrome ends and a ribbed white diffuser which provides soft, uniform illumination. Fixture can be mounted vertically or horizontally.


T8 Lamps		
Item #	Lamps	W-L-D
4115-EL	1-F14T8	4 1/4" - 15 1/4" - 2 5/8"
4118-EL	1-F15T8	4 1/4" - 18 1/4" - 2 5/8"
4124-117	1-F17T8	4 1/4" - 24 1/4" - 2 5/8"
4136-125	1-F25T8	4 1/4" - 36 1/4" - 2 5/8"
4148-132	1-F32T8	4 1/4" - 48 1/4" - 2 5/8"

OPTIONS*

- 20 (Baked White)
- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- CO (Convenience Outlet)
- PLG (6' SJT Grounded Cord & Plug)
- PLS (Switch & Pull Chain)
- WL (6 GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)



4124-117




TRADITIONAL TWO LAMP VANITY • 4200 SERIES

Wall mounted fixture with chrome ends and a ribbed white diffuser which provides soft, uniform illumination. Fixture can be mounted vertically or horizontally.



4236-225



T8 Lamps		
Item #	Lamps	W-L-D
4218-EL	2-F15T8	5 3/8" - 18 1/4" - 3 1/4"
4224-217	2-F17T8	5 3/8" - 24 1/4" - 3 1/4"
4236-225	2-F25T8	5 3/8" - 36 1/4" - 3 1/4"
4248-232	2-F32T8	5 3/8" - 48 1/4" - 3 1/4"

OPTIONS*


- 20 (Baked White)
- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- CO (Convenience Outlet)
- PLG (6' SJT Grounded Cord & Plug)
- PLS (Switch & Pull Chain)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)

BOX VANITY • 4300 SERIES

Wall mounted fixture with baked white enamel ends and a smooth white acrylic diffuser to suit any lighting application. Fixture can be mounted vertically or horizontally. Ends also available in chrome, brass and a variety of wood finishes.



4324-217-20
Finish codes, see pg. 42



T8 Lamps		
Item #	Lamps	W-L-D
4318-EL-20	2-F15T8	4 1/4" - 18 1/4" - 4 1/2"
4324-217-20	2-F17T8	4 1/4" - 24 1/4" - 4 1/2"
4336-225-20	2-F25T8	4 1/4" - 36 1/4" - 4 1/2"
4348-232-20	2-F32T8	4 1/4" - 48 1/4" - 4 1/2"

OPTIONS*


- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- BFL (Front Baffle)
- CO (Convenience Outlet)
- PA (Prismatic Acrylic Diffuser)
- PB (Polished Brass Ends)
- CRM (Chrome Ends)
- WE (Wood Ends)
- PLS (Switch & Pull Chain)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)

ARCHITECTURAL VANITY • 4400 SERIES

Our Architectural linear wall mount vanity provides an indirect luminaire with forward throw optics designed for sconce applications, such as hospitality, restrooms, corridors or small offices. This fixture is standard in perforated white powder coat housing. Also available with an overlay lens, semi-specular or white louver. Other finish options available. A companion to our Architectural Indirect Thin Line 6900 series.

OPTIONS*

- DIM (Dimming Ballast)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)
- DHS (Daylight Harvesting)
- OL (Overlay Lens)
- LV-W (White Louver)
- LV-SS (Semi-specular Louver)
- OS (Occupancy Sensor)




T8 Lamps

Item #	Lamps	W-L-D
4424-217	2-F17T8	5" - 25 3/4" - 2 3/4"
4436-225	2-F25T8	5" - 37 3/4" - 2 3/4"
4448-232	2-F32T8	5" - 49 1/4" - 2 3/4"
4496-232T/1	4-F32T8	5" - 98" - 2 3/4"

T5 Lamps

Item #	Lamps	W-L-D
4424-214	2-F14T5	5" - 25 3/4" - 2 3/4"
4424-224	2-F24T5HO	5" - 25 3/4" - 2 3/4"
4436-221	2-F21T5	5" - 37 3/4" - 2 3/4"
4436-239	2-F39T5HO	5" - 37 3/4" - 2 3/4"
4448-228	2-F28T5	5" - 49 1/4" - 2 3/4"
4448-254	2-F54T5HO	5" - 49 1/4" - 2 3/4"
4496-228T/2	4-F28T5	5" - 98" - 2 3/4"
4496-254T/1	4-F54T5HO	5" - 98" - 2 3/4"

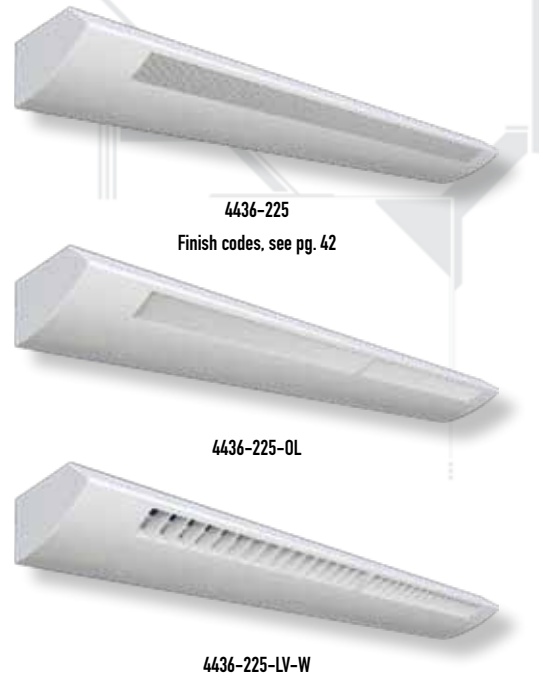

TUBE VANITY • 4600 SERIES


Crescent shaped tubular design with either a smooth white acrylic diffuser or ribbed frosted diffuser.

T8 Lamps


Item #	Lamps	W-L-D
4624	2-F17T8	4 13/16" - 25 15/16" - 4"
4636	2-F25T8	4 13/16" - 37 15/16" - 4"
4648	2-F32T8	4 13/16" - 49 15/16" - 4"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- BRS (Brass End Cap Accents)
- CRM (Chrome End Cap Accents)
- CR (Clear Ribbed Lens)
- FR (Frosted Ribbed Lens)
- WR (White Ribbed Lens)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)

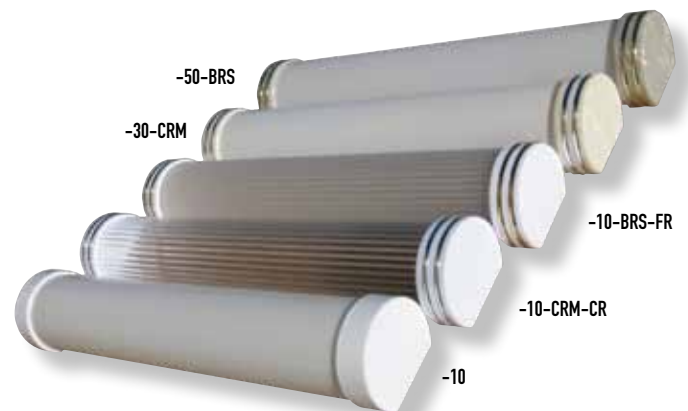

Finish codes, see pg. 42




*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

PUFF VANITY • 4500 SERIES

Wall mounted fixture with decorative white acrylic diffuser and rounded edges for soft uniform illumination. Fixture can be wall or ceiling mounted.



4548-232



T8 Lamps		
Item #	Lamps	W-L-D
4524-117	1-F17T8	6" - 26 13/16" - 4 1/2"
4524-217	2-F17T8	6" - 26 13/16" - 4 1/2"
4536-125	1-F25T8	6" - 38 13/16" - 4 1/2"
4536-225	2-F25T8	6" - 38 13/16" - 4 1/2"
4548-132	1-F32T8	6" - 50 13/16" - 4 1/2"
4548-232	2-F32T8	6" - 50 13/16" - 4 1/2"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)

T5 Lamps		
Item #	Lamps	W-L-D
4524-214	2-F14T5	6" - 26 13/16" - 4 1/2"
4524-224	2-F24T5H0	6" - 26 13/16" - 4 1/2"
4536-221	2-F21T5	6" - 38 13/16" - 4 1/2"
4536-239	2-F39T5H0	6" - 38 13/16" - 4 1/2"
4548-228	2-F28T5	6" - 50 13/16" - 4 1/2"
4548-254	2-F54T5H0	6" - 50 13/16" - 4 1/2"


ROUNDED SCNCE • 4700 SERIES

Decorative wall fixture in bright white acrylic for use in bathrooms, hallways or any other interior space to create great accent lighting. Meets ADA requirements.



4713Q-EL-10

Finish codes, see pg. 42



Item #	Lamps	W-L-D
4713Q-EL	1-F13BX4P	11 3/4" - 5 3/4" - 4"
4718Q-EL	1-F18BX4P	11 3/4" - 5 3/4" - 4"
4726Q-EL	1-F26BX4P	11 3/4" - 5 3/4" - 4"
47213Q-EL	2-F13DBX4P	14" - 5 3/4" - 4 1/2"
47218Q-EL	2-F18DBX4P	19" - 5 3/4" - 4 1/2"
47226Q-EL	2-F26DBX4P	19" - 5 3/4" - 4"

OPTIONS*

- WL ( GE Lamps Installed)
- DIM (Dimming Ballast)
- UNV (120/277 volt)
- CRM (Chrome Trim)
- BRS (Brass Trim)
- RIB (Ribbed Lens)
- LED (Light-Emitting Diode)

DECORATIVE TRIANGULAR SCONCE • 9800 SERIES

Triangular shaped wall fixture with design to help achieve that elegant look. Available in variety of finishes with brass or chrome trim options. Meets ADA requirements.


Item #	Lamps	W-L-D
9813Q-EL	1-F13BX4P	13 1/4"-7 1/4"-3 5/8"
9818Q-EL	1-F18BX4P	13 1/4"-7 1/4"-3 5/8"
9826Q-EL	1-F26BX4P	13 1/4"-7 1/4"-3 5/8"



9818Q-EL-50

OPTIONS*


- BRS (Brass Trim)
- CRM (Chrome Trim)
- RIB (Ribbed Lens)
- WL (GE Lamps Installed)
- UNV (120/277 volt)
- LED (Light-Emitting Diode)



DECORATIVE FROSTED GLASS SCONCE • 9900 SERIES

This frosted glass sconce comes with brushed nickel accent. Open on both top and bottom for maximum light output. Comes standard with lamps installed. Meets ADA requirements.

Item #	Lamps	W-L-D
99213Q-EL	2-F13DBX4P	10" - 15 3/4" - 4"
99226Q-EL	2-F26DBX4P	10" - 15 3/4" - 4"

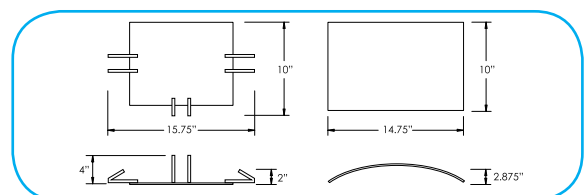

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

COMPACT WALL PACK • 9200 SERIES


A low wattage fluorescent fixture designed for patios, walkways, stairwells or hallways. Can be wall or ceiling mounted. Steel backplate in black or white finish with prismatic lenses also available in clear or opal acrylic



9213Q-EL-BLK-20



9218Q-EL-WHT-10



Item #	Lamps	W-L-D
9213Q-EL	1-F13BX4P	5" - 9" - 4"
9218Q-EL	1-F18DBX4P	5" - 9" - 4"
9226Q-EL	1-F26DBX4P	5" - 9" - 4"

FINISH CODES

- BLK (Black)
- WHT (White)

LENS CODES

- 10 (Clear Acrylic Lens)
- 20 (Opal Acrylic Lens)

OPTIONS*

- WL ( GE Lamps Installed)
- UNV (120/277 volt)
- LED (Light-Emitting Diode)

EXTERIOR WALL LANTERN • 9300 SERIES


A low wattage fluorescent fixture that is perfectly suited for wall mounted applications on patios, walkways or porches. Available in white or black finish.



9326Q-EL-WHT



9326Q-EL-BLK



Item #	Lamps	W-L-D
9313Q-EL	1-F13BX4P	7 3/4" - 11 1/4" - 3 3/16"
9318Q-EL	1-F18BX4P	7 3/4" - 11 1/4" - 3 3/16"
9326Q-EL	1-F26BX4P	7 3/4" - 11 1/4" - 3 3/16"

FINISH CODES

- BLK (Black)
- WHT (White)

OPTIONS*

- WL ( GE Lamps Installed)
- PC (Photo Cell)
- LED (Light-Emitting Diode)

BULKHEADS • 9400 / 9600 SERIES

Our Bulkheads are constructed of a white powdercoat die cast housing and frosted glass lens. It is available as a compact fluorescent or low wattage led fixture. Suitable for a variety of applications including patios, walkways or porches. Standard in white, with lamps installed.

OVAL		
Item #	Lamps	W-L-D
9413Q-EL	1-F13DBX	10 1/2" - 6 1/2" - 5 1/2"
9418Q-EL	1-F18DBX	10 1/2" - 6 1/2" - 5 1/2"
94213Q-EL	2-F13DBX	10 1/2" - 6 1/2" - 5 1/2"
9409-LED	9 watt LED	10 1/2" - 6 1/2" - 5 1/2"

ROUND		
Item #	Lamps	W-L-D
9613Q-EL	1-F13DBX	9 1/2" - 9 1/2" - 5 1/4"
9618Q-EL	1-F18DBX	9 1/2" - 9 1/2" - 5 1/4"
96213Q-EL	2-F13DBX	9 1/2" - 9 1/2" - 5 1/4"
9614-LED	14 watt LED	9 1/2" - 9 1/2" - 5 1/4"



OPTIONS*

- BLK (Black Housing)



94213Q-EL

9613Q-EL



VAPORTITE ENCLOSED STRIP • 7500 SERIES

Fiberglass housing with bonded gasket to seal against dust, moisture, and other corrosive elements. Clear acrylic diffuser with textured pattern to help keep light uniform. Mounting brackets included for easy installation.

T5 Lamps		
Item #	Lamps	W-L-D
7524-214	2-F14T5	6 5/8" - 25 13/16" - 4 7/8"
7524-224	2-F24T5H0	6 5/8" - 25 13/16" - 4 7/8"
7548-228	2-F28T5	6 5/8" - 49 13/16" - 4 7/8"
7548-254	2-F54T5H0	6 5/8" - 49 13/16" - 4 7/8"
7596-228T/2	4-F28T5	6 5/8" - 97 13/16" - 4 7/8"
7596-254T/1	4-F54T5H0	6 5/8" - 97 13/16" - 4 7/8"


T8 Lamps		
Item #	Lamps	W-L-D
7524-117	1-F17T8	6 5/8" - 25 13/16" - 4 7/8"
7524-217	2-F17T8	6 5/8" - 25 13/16" - 4 7/8"
7548-132	1-F32T8	6 5/8" - 49 13/16" - 4 7/8"
7548-232	2-F32T8	6 5/8" - 49 13/16" - 4 7/8"
7596-T8-EL	2-F96T8	6 5/8" - 97 13/16" - 4 7/8"
7596-232T/1	4-F32T8	6 5/8" - 97 13/16" - 4 7/8"
7596-232T/2	4-F32T8	6 5/8" - 97 13/16" - 4 7/8"
7596-T8EL-H0	2-F96T8-H0	6 5/8" - 97 13/16" - 4 7/8"
7596-T12EL-H0	2-F96T12-H0	6 5/8" - 97 13/16" - 4 7/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- OS (Occupancy Sensor)
- PC (Polycarbonate Diffuser)
- TPL (Tamper Proof Latches)
- WL ( GE Lamps Installed)
- 277 (277 volt)
- UNV (120/277 volt)



7548-232




*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

COMPACT VAPORTITE ENCLOSED STRIP • 7600 SERIES

Fiberglass housing with bonded gasket to seal against dust, moisture, and other corrosive elements. UV stabilized ribbed polycarbonate diffuser to help keep light uniform. Mounting brackets included for easy installation.



7660-235



T8 Lamps		
Item #	Lamps	W-L-D
7624-117	1-F17T8	4 1/2" - 2' - 4 1/8"
7624-217	2-F17T8	7 1/3" - 2' - 4 1/8"
7648-132	1-F32T8	4 1/2" - 4' - 4 1/8"
7648-232	2-F32T8	7 1/3" - 4' - 4 1/8"
7660-140	1-F40T8	4 1/2" - 5' - 4 1/8"
7660-240	2-F40T8	7 1/3" - 5' - 4 1/8"
7696-232T/1	4-F32T8	7 1/3" - 8' - 4 1/8"
7696-232T/2	4-F32T8	7 1/3" - 8' - 4 1/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- OS (Occupancy Sensor)
- PC (Polycarbonate Diffuser)
- WL ( GE Lamps Installed)
- UNV (120/277 volt)
- 277 (277 volt)

T5 Lamps		
Item #	Lamps	W-L-D
7624-114	1-F14T5	4 1/2" - 2' - 4 1/8"
7624-214	2-F14T5	7 1/3" - 2' - 4 1/8"
7624-124	1-F24T5H0	4 1/2" - 2' - 4 1/8"
7624-224	2-F24T5H0	7 1/3" - 2' - 4 1/8"
7648-128	1-F28T5	4 1/2" - 4' - 4 1/8"
7648-228	2-F28T5	7 1/3" - 4' - 4 1/8"
7648-154	1-F54T5H0	4 1/2" - 4' - 4 1/8"
7648-254	2-F54T5H0	7 1/3" - 4' - 4 1/8"
7660-135	1-F35T5	4 1/2" - 5' - 4 1/8"
7660-235	2-F35T5	7 1/3" - 5' - 4 1/8"
7660-180	1-F80T5H0	4 1/2" - 5' - 4 1/8"
7660-280	2-F80T5H0	7 1/3" - 5' - 4 1/8"
7696-228T/2	4-F28T5	7 1/3" - 8' - 4 1/8"
7696-254T/1	4-F54T5H0	7 1/3" - 8' - 4 1/8"

ROUND/SQUARE GASKETED FIXTURE • 7700/7800 SERIES

A fully gasketed fixtures designed to prevent dust, moisture, and insects from entering the fixture. Round or square polycarbonate housing, available in black or white. The high-impact polycarbonate lens is available in either clear prismatic or white. Perfect for any wall or ceiling application that calls for a weather or vandal proof fixture.



7822-BLK-20

7722-BLK-10



ROUND		
Item #	Lamps	W-L-D
7722-EL	1-FC8T9CW	11 1/4" Rnd - 3 1/2"
7713Q-EL	1-F13BX4P	11 1/4" Rnd - 3 1/2"
77213Q-EL	2-F13BX4P	11 1/4" Rnd - 3 1/2"
7726Q-EL	1-F26DBXP	11 1/4" Rnd - 3 1/2"

SQUARE		
Item #	Lamps	W-L-D
7822-EL	1-FC8T9	10 1/2" SQ - 4"
7813Q-EL	1-F13DBX4P	10 1/2" SQ - 4"
78213Q-EL	2-F13DBX4P	10 1/2" SQ - 4"
7826Q-EL	1-F26DBX4P	10 1/2" SQ - 4"

FINISH CODES



- BLK (Black)
- WHT (White)

LENS CODES

- 10 (Clear Acrylic Lens)
- 20 (Opal Acrylic Lens)

OPTIONS*

- WL ( GE Lamps Installed)
- UNV (120/277 volt)
- LED (Light-Emitting Diode)



INDUCTION COBRA HEAD / STREET LIGHTING • iCOBRA


This induction street light is designed for Freeways, Highways, Parking Lots, and Residential Street Lighting. This Die cast aluminum housing with corrosion resistant power coat finish is standard universal 120/277 volt and IP55 rated for wet location.

Item #	Watts	Initial Lumens	Dimensions
iCobra-70	70	5,250	14" - 30" - 10 1/4"
iCobra-100	100	8,000	14" - 30" - 10 1/4"



OPTIONS*

- FL (Flat Lens Style)
- DL (Drop Lens Style)
- PC (Photocell)
- 480 (480 volt)

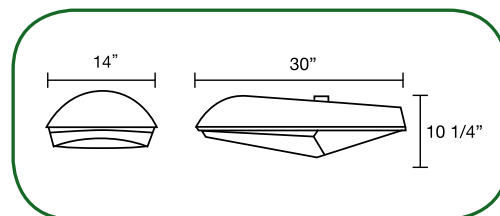

INDUCTION COBRA HEAD / STREET LIGHTING • iCOBRA2


Designed for residential streets our Cobra Street Light offers many advantages over traditional HPS or Metal Halide fixtures. Longer life, lighter weight, lower depreciation time, higher CRI, cooler operation temperature and higher scotopic lumens per watt. This architectural die cast aluminum housing is standard universal 120/277 volt and IP55 rated for wet location.

Item #	Watts	Initial Lumens	Dimensions
iCobra2-120	120	9,600	14 1/2" - 31 1/2" - 7 3/4"
iCobra2-150	150	12,000	14 1/2" - 31 1/2" - 7 3/4"
iCobra2-200	200	17,000	16 1/2" - 41 1/2" - 10 3/4"
iCobra2-250	250	22,500	16 1/2" - 41 1/2" - 10 3/4"



OPTIONS*


- FL (Flat Lens Style)
- DL (Drop Lens Style)
- GL (Glass Lens)
- PB (Polycarbonate Lens)
- PC (Photocell)
- 480 (480 volt)

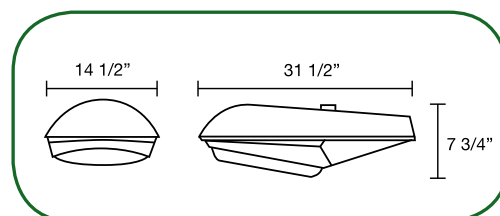

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUCTION HIGH BAY • HBi

Perfect for warehouses, gymnasiums and retail establishments. This induction high bay has a lamp life of 100,000 hours and is offered standard with a aluminum dome for maximum down light. Also offered in a acrylic dome for light dispersion as an option.



Item #	Watts	Initial Lumens	Diameter
HBi-100	100	8,000	16"
HBi-120	120	9,600	22"
HBi-150	150	12,000	22"
HBi-200	200	17,000	22"

OPTIONS*


- ACR (Acrylic Dome)
- WG (Wire Guard)
- CL (Clear Lens)
- PLG (6' SJT Grounded Cord & Plug)
- UNV (120/277)

INDUCTION HIGH BAY • HBi2

Specifically designed for warehouses, supermarkets, exhibition halls, and factories, our HBi2 400 watt induction high bay is constructed of aluminum; the housing is finished with a corrosion resistant power coat and the specular aluminum reflector provides maximum efficiency. Rated with lamp life of 100,000 hours this fixture comes standard in 5000K color temperature.



HBi2-400

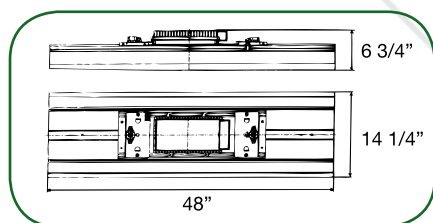

Item #	Watts	Initial Lumens	Dimensions
HBi2-400	400	36,000	14 1/4" - 48" - 6 3/4"

OPTIONS*

- 480 (480 volt)
- WG (Wire Guard)
- OS (Occupancy Sensor)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist lockcord and Plug)


INDUCTION WALL PACK • WPI

The classic wall pack provides general lighting to building perimeters. Ideal for walls of buildings, lobbies, corridors and vehicle underpasses. Lamp life is rated for 100,000 hours.

Item #	Watts	Initial Lumens	Dimensions
WPI-40	40	2,800	13" - 7 1/2" - 9"
WPI-70	70	5,250	18" - 9 7/8" - 9 1/2"
WPI-80	80	6,000	18" - 9 7/8" - 9 1/2"
WPI-100	100	8,000	18" - 9 7/8" - 13"
WPI-120	120	9,600	18" - 9 7/8" - 13"



WPI-120

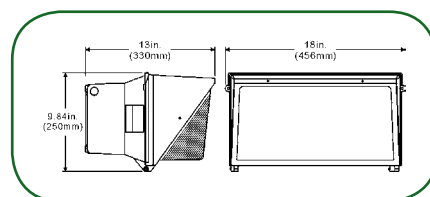


OPTIONS*

- UNV (120/277)

INDUCTION WALL PACK • WPI2

This modern style wall pack provides general lighting to building perimeters. Ideal for walls of buildings, lobbies, corridors and vehicle underpasses. Lamp life is rated for 100,000 hours.

Item #	Watts	Initial Lumens	Dimensions
WPI2-40	40	2,800	16" - 16" - 7 1/2"
WPI2-70	70	5,250	16" - 16" - 7 1/2"
WPI2-80	80	6,000	16" - 16" - 7 1/2"

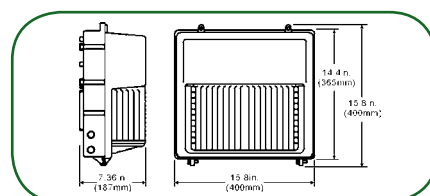


OPTIONS*

- UNV (120/277)

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUCTION SQUARE GARAGE LIGHT • GLi

This induction square canopy is vandal resistant and is designed for a variety of applications, including multi-level parking garages.




Item #	Watts	Initial Lumens	Dimensions
GLi-40	40	2,800	12 3/8" - 12 3/8" - 8 5/8"
GLi-70	70	5,250	12 3/8" - 12 3/8" - 8 5/8"
GLi-80	80	6,000	12 3/8" - 12 3/8" - 8 5/8"

OPTIONS*

- UNV (120/277)

INDUCTION ROUND GARAGE LIGHT • GLi2

This round induction garage light is equipped with a vandal resistant cone lens. Suitable for a variety of applications.



Item #	Watts	Initial Lumens	Dimensions
GLi2-40	40	2,800	15" round - 11 1/4"
GLi2-70	70	5,250	15" round - 11 1/4"
GLi2-80	80	6,000	15" round - 11 1/4"
GLi2-100	100	8,000	15" round - 11 1/4"
GLi2-120	120	9,600	15" round - 11 1/4"


OPTIONS*

- UNV (120/277)

INDUCTION ROUND GARAGE LIGHT • GLi3

This energy efficient low wattage round induction garage light is suitable for a variety of applications including multi-level parking garages, walkways and retail establishments.

Item #	Watts	Initial Lumens	Dimensions
GLi3-40	40	2,800	15" round - 8"
GLi3-70	70	5,250	15" round - 8"
GLi3-80	80	6,000	15" round - 8"

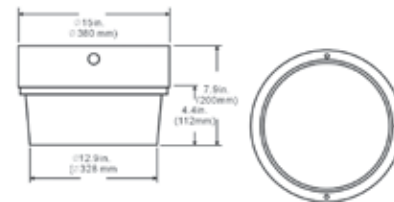


OPTIONS*

- UNV (120/277)

INDUCTION DESIGNER GARAGE LIGHT • GLi4

This energy efficient designer induction garage light is suitable for a variety of applications including multi-level parking garages, walkways and retail establishments.

Item #	Watts	Initial Lumens	Dimensions
GLi4-40	40	2,800	15" round - 11 1/3"
GLi4-70	70	5,250	15" round - 11 1/3"
GLi4-80	80	6,000	15" round - 11 1/3"

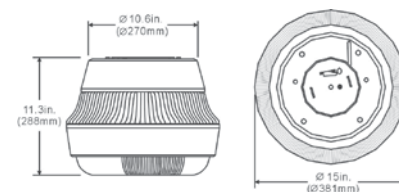

OPTIONS*

- UNV (120/277)


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUCTION LARGE CANOPY LIGHT • LCI

This induction canopy light is designed for a variety of applications including gas stations, loading docks, underpasses and parking garages.



Item #	Watts	Initial Lumens	Dimensions
LCI-120	120	9,600	19" - 18" - 13 1/2"
LCI-150	150	12,000	19" - 18" - 13 1/2"
LCI-200	200	17,000	19" - 18" - 13 1/2"

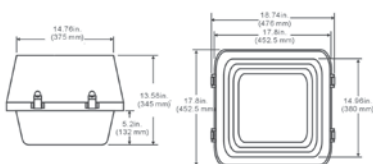

OPTIONS*


- UNV (120/277)

INDUCTION SMALL FLOOD • FLI

This low wattage small induction flood is suitable for a variety of applications such as parks, pools and sporting facilities.



Item #	Watts	Initial Lumens	Dimensions
FLI-40	40	2,800	15" - 13 1/2" - 10 1/2"

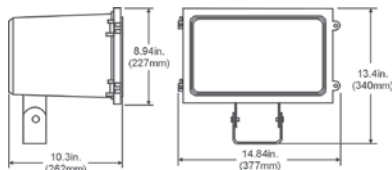

OPTIONS*

- UNV (120/277)
- WG (Wireguard)
- SB (Swivel Bracket)
- SF (Slip Fitter)
- HY (Handle Yoke)
- PMA (Direct Pole Mount Arm)

INDUCTION SHOEBOX • PLi

Induction Shoebox Fixture offers many advantages over traditional HID fixtures. Great for parking lots, tennis courts and areas requiring maximum light out.


Item #	Watts	Initial Lumens	Dimensions
PLi-70	70	5,250	21 1/2" - 17 1/2" - 7"
PLi-80	80	6,000	21 1/2" - 17 1/2" - 7"
PLi-100	100	8,000	21 1/2" - 17 1/2" - 7"
PLi-120	120	9,600	24" - 24 1/2" - 10 1/4"
PLi-150	150	12,000	24" - 24 1/2" - 10 1/4"
PLi-200	200	17,000	24" - 24 1/2" - 10 1/4"
PLi-400	400	32,600	24" - 24 1/2" - 10 1/4"

OPTIONS*

- UNV (120/277)
- WG (Wireguard)
- SB (Swivel Bracket)
- SF (Slip Fitter)
- HY (Handle Yoke)
- PMA (Direct Pole Mount Arm)



PLi-100




INDUCTION BULB • i-bulb

The iBulb uses the basic technology for induction. Essentially, the iBulb relies on the fundamental principles of electromagnetic induction and gas discharge to create light. The elimination of filaments and electrodes results in a lamp of unmatched life. Standard in 5000 kelvin temperature.

Item #	Dimensions
i-bulb-15-120	7 1/2" - 3 1/4"
i-bulb-15-277	7 1/2" - 3 1/4"
i-bulb-23-120	7 3/4" - 3 1/2"
i-bulb-23-277	7 3/4" - 3 1/2"
i-bulb-40-120	9 3/4" - 4 1/2"
i-bulb-40-227	9 3/4" - 4 1/2"



3 year warranty when installed base down




*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUCTION ARCHITECTURAL AREA LIGHT • ALi

This Induction Architectural Area Light has a lamp life of 100,000 hours. Equipped with a gas-tight silicon rubber seal and IP54 rated for wet location applications. Ideal for Parking Lots, Plazas, Shopping Malls and Tennis Courts. Standard with 5000K lamps and clear tempered glass lens, optional UV stabilized and heat resistant polycarbonate lens also available.



Item #	Watts	Initial Lumens	Dimensions
ALi-200	200	17,000	21 1/2" - 31 1/3" - 9"
ALi-250	250	22,500	22 3/4" - 32 1/2" - 9 1/4"
ALi-300	300	27,000	22 3/4" - 32 1/2" - 9 1/4"

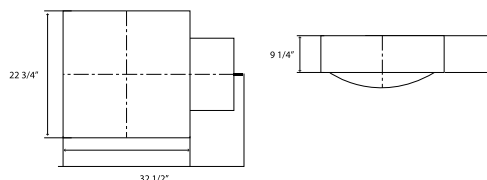


OPTIONS*

- DIM (Dimming Ballast)
- 480 (480 volt)
- PC (Photo Cell)
- UV (Heat Resistant Polycarbonate Lens)

RETROFIT KIT – 85-RFK SERIES

This retro fit kit is for maximizing light output from a 2 lamp strip fixture. Designed for delamping from a 4 lamp strip to a 2 lamp strip lighting fixture. Your choice of a standard White reflector or an 86% reflectance Anodized Aluminum reflector. Fits standard 4 1/4" wide strips. Available in both T5 and T8 configurations.

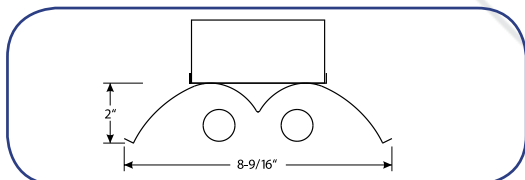

Item #	Reflector	Lamps	W-L-D
85-RFK24-217-W	white reflector	2-F24T8	8 9/16" - 24" - 2"
85-RFK24-217-A	aluminum reflector	2-F24T8	8 9/16" - 24" - 2"
85-RFK24-224-W	white reflector	2-F24T5HO	8 9/16" - 24" - 2"
85-RFK24-224-A	aluminum reflector	2-F24T5HO	8 9/16" - 24" - 2"
85-RFK36-225-W	white reflector	2-F25T8	8 9/16" - 36" - 2"
85-RFK36-225-A	aluminum reflector	2-F25T8	8 9/16" - 36" - 2"
85-RFK36-239-W	white reflector	2-F39T5HO	8 9/16" - 36" - 2"
85-RFK36-239-A	aluminum reflector	2-F39T5HO	8 9/16" - 36" - 2"
85-RFK48-232-W	white reflector	2-F32T8	8 9/16" - 48" - 2"
85-RFK48-232-A	aluminum reflector	2-F32T8	8 9/16" - 48" - 2"
85-RFK48-254-W	white reflector	2-F54T5HO	8 9/16" - 48" - 2"
85-RFK48-254-A	aluminum reflector	2-F54T5HO	8 9/16" - 48" - 2"
85-RFK96-232T1-W	white reflector	4-F32T8	8 9/16" - 96" - 2"
85-RFK96-232T1-A	aluminum reflector	4-F32T8	8 9/16" - 96" - 2"
85-RFK96-254T1-W	white reflector	4-F54T5HO	8 9/16" - 96" - 2"
85-RFK96-254T1-A	aluminum reflector	4-F54T5HO	8 9/16" - 96" - 2"


*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg.45 for upgrade options.

RETROFIT KIT – 74-RFK SERIES

This economical reflector kit reduces energy, improves efficiency and keeps light loss to a minimum. Used to delamp grid troffers from a 4 lamp to 2 lamp fixture, your choice of a standard white reflector or an 86% reflectance Anodized Aluminum reflector. Customized to fit most standard recessed housing 2X2 and 2X4.

Item #	Reflector	Lamps	W-L-D
74-RFK-22-217-W	white reflector	2-F17T8	21 3/32" - 24" - 2 1/2"
74-RFK-22-217-A	aluminum reflector	2-F17T8	21 3/32" - 24" - 2 1/2"
74-RFK-22-224-W	white reflector	2-F24T8	21 3/32" - 24" - 2 1/2"
74-RFK-22-224-A	aluminum reflector	2-F24T8	21 3/32" - 24" - 2 1/2"
74-RFK-24-232-W	white reflector	2-F32T8	21 3/32" - 48" - 2 1/2"
74-RFK-24-232-A	aluminum reflector	2-F32T8	21 3/32" - 48" - 2 1/2"
74-RFK-24-254-W	white reflector	2-F54T8	21 3/32" - 48" - 2 1/2"
74-RFK-24-254-A	aluminum reflector	2-F54T8	21 3/32" - 48" - 2 1/2"

*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg.45 for upgrade options.

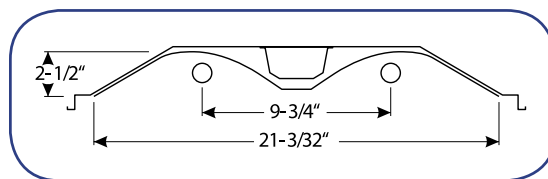


RETROFIT KIT – RDI XL SERIES

The RDI-XL, a radial Duriflex diffuser between the sloping acrylic panels provides the look and feel of a deep RDI luminaire available in both T-5 and T-8 configurations customized to fit most standard recessed housing 2X2 and 2X4.


Item #	Dimensions
RDI-XL-RFK-22-117	2x2 T8 (1) Lamp
RDI-XL-RFK-22-217	2x2 T8 (2) Lamp
RDI-XL-RFK-22-124	2x2 T5HO (1) Lamp
RDI-XL-RFK-22-224	2x2 T5HO (2) Lamp
RDI-XL-RFK-24-132	2x4 T8 (1) Lamp
RDI-XL-RFK-24-232	2x4 T8 (2) Lamp
RDI-XL-RFK-24-154	2x4 T5HO (1) Lamp
RDI-XL-RFK-24-254	2x4 T5HO (2) Lamp

*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg.45 for upgrade options.



RETROFIT KIT – RDI BFL SERIES

A white aluminum baffle with sloping acrylic side panels maintains the look and feel of a deep RDI luminaire available in both T-5 and T-8.




Item #	Dimensions
RDI-BFL-RFK-22-117	2x2 T8 (1) Lamp
RDI-BFL-RFK-22-217	2x2 T8 (2) Lamp
RDI-BFL-RFK-22-124	2x2 T5HO (1) Lamp
RDI-BFL-RFK-22-224	2x2 T5HO (2) Lamp
RDI-BFL-RFK-24-132	2x4 T8 (1) Lamp
RDI-BFL-RFK-24-232	2x4 T8 (2) Lamp
RDI-BFL-RFK-24-154	2x4 T5HO (1) Lamp
RDI-BFL-RFK-24-254	2x4 T5HO (2) Lamp

*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg.45 for upgrade options.

RETROFIT KIT – RDI BSK SERIES

This kit provides the look and feel of a deep RDI luminaire. Available in both T-5 and T-8 configurations. Customized to fit most standard recessed housing 2X2 and 2X4.



Item #	Dimensions
RDI-BSK-RFK-22-117	2x2 T8 (1) Lamp
RDI-BSK-RFK-22-217	2x2 T8 (2) Lamp
RDI-BSK-RFK-22-124	2x2 T5HO (1) Lamp
RDI-BSK-RFK-22-224	2x2 T5HO (2) Lamp
RDI-BSK-RFK-24-132	2x4 T8 (1) Lamp
RDI-BSK-RFK-24-232	2x4 T8 (2) Lamp
RDI-BSK-RFK-24-154	2x4 T5HO (1) Lamp
RDI-BSK-RFK-24-254	2x4 T5HO (2) Lamp

*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg.45 for upgrade options.

LAMPS AND BALLAST

BALLAST

1 Light T8 Ballast	2 Light T8 Ballast		3 Light T8 Ballast	4 Light T8 Ballast	1 Light T5 Ballast	2 Light T5 Ballast	4 Light T5 Ballast
GE-132MAX-L/ULTRA	GE-232-MV-L	GE-232-MVPS-L	GE-332-MV-L	GE-432-MV-L	GE100MVPS-D	GE228-MVPSH-A	GE454MVPS90-E
GE-132MAX-N/ULTRA	GE-232-MV-H	GE-232-MVPS-N	GE-332-MV-H	GE-432-MV-H		GE228-MVPS-A	GE454MVPSN1
GE-159MAX-N/ULTRA	GE-232MAX-L/ULTRA	GE-232-MVPS-H	GE-332MAX-L/ULTRA	GE-432MAX-L/ULTRA		B228PUNV-C061C	
GE-159-MV-N	GE-232MAX-N/ULTRA	GE-259-MAX-N/ULTRA	GE-332MAX-N/ULTRA	GE-432MAX-N/ULTRA		B224PUNV-C061C	
	GE-232MAX-H/ULTRA	GE-259-MV-N	GE-332MAX-H/ULTRA	GE-432MAX-H/ULTRA		B239PUNV-D061C	
	GE-232-120-PS-N	GE-259-120-N	GE-332-120-PS-N	GE-432-120-PS-N		GE254MVPS90-F	
	GE-232-277-PS-N	GE-259-277-N	GE-332-277-PS-N	GE-432-277-PS-N		B254PUNV-D061C	
			GE-332-MVPS-L	GE-432-MVPS-L		GE254MVPS-D	
			GE-332-MVPS-N	GE-432-MVPS-N			
			GE-332-MVPS-H	GE-432-MVPS-H			

LAMPS ** indicates lamp color temperature

2' T8 LAMP	3' T8 LAMP	4' T8 LAMP	8' T8 LAMP	2' T5 LAMP	3' T5 LAMP	4' T5 LAMP	5' T5 LAMP
F17T8/SP**/ECO	F25T8/SP**/ECO	F28T8/XL/SPX**/ECO	F96T8/SP**	F14W/T5/8**/ECO	F21W/T5/8**/ECO	F28W/T5/8**/ECO	F35W/T5/85**/ECO
F17T8/SPX**/ECO	F25T8/SPX**/ECO	F32T8/25W/SPX**/ECO	F96T8/SPX**	F14T5/8**/WM/ECO	F21T5/8**/WM/ECO	F28T5/8**/WM/ECO	F35T5/8**/ECO
F17T8/XL/SP**/ECO	F25T8/XL/SP**/ECO	F32T8/SPX**/ECO	F96T8/SP**/ECO	F24W/T5/8**/ECO (HO)	F39W/T5/8**/ECO (HO)	F54W/T5/8**/ECO (HO)	F80W/T5/8**/ECO (HO)
F17T8/XL/SPX**/ECO	F25T8/XL/SPX**/ECO	F32T8/XL/SP**/ECO	F96T8/XL/SP**				
F17T8/XL/SPX**/WM/ECO	F25T8/XL/SPX**/WM/ECO	F32T8/XL/SPX**/ECO	F96T8/XL/SPX**				
		F32T8/XL/SP**/WM/ECO	F96T8/XL/SP**/WM				
		F32T8/XL/SPX**/HL/ECO	F96T8/XL/SP**/WMP				

OPTIONS AND ACCESSORIES

WOOD FINISH CODES



10 UNFINISHED




20 WHITE WASHED



30 STARK WHITE



40 GOLDEN OAK




50 DARK OAK



60 RED OAK




70 PICKLED



80 PAINTED WHITE


END CAP & SCENCE LENS CODES



10 SOLID WHITE



20 WHITE MARBLE



30 IVORY MARBLE



40 PEACH MARBLE



50 ALABASTER

4000, 5000 & 6900 SERIES FINISH OPTIONS



GLOSS
WHITE



TEXTURED
FINISH



TEXTURED
VERDE PATINA



SATIN
BRASS



METALLIC
NICKEL



TEXTURED
BLACK



BLACK



TEXTURED
RUST



TEXTURED
BRONZE



ARCHITECTURAL
BRONZE



STEEL
GRAY

GRIPPERS AND ACCESSORIES



GA-7996



GA-7997



GA-7998



GA-7999



GA-8000



V-HOOK



AC



Cable Yoke

The GA-8000 gripper is designed to work with optional V-hook or a cable yoke can be designed with a maximum end ball diameter of 4mm. Unlike traditional chain hanging, no need to spend time measuring or waste scrap. Cable suspension offers a cleaner look than chain and collects less dust. Adjustment at the fixture level means less time on a ladder or lift.

ORDERS

No minimum order requirement. All items must be ordered by their catalog number. Please specify finish desired when more than one is available.

TERMS

1% 10 Prox from invoice date, net 30 days with prior approved credit. All unpaid accounts after maturity will be charged an additional 1 1/2% interest rate and will be charged back for any prepaid freight charges as well. All returned checks are subject to an additional service charge and subsequent orders will be shipped on a COD basis only. We accept payment in the form of Visa, Mastercard, Discover, Money Order or company check.

CREDIT POLICIES

All requests for an open account are subject to credit approval. Customers must complete a credit application and allow at least one week for processing. To expedite your initial order, please send a check for full amount or pay C.O.D.

FREIGHT

All Shipments are F.O.B. FSC warehouse.

FREIGHT ALLOWED ON ALL ORDERS OF \$1500 OR MORE in the state of California and \$2500 in all other states excluding HI and AK when paid within terms. We reserve the right to select the carrier on all shipments unless special arrangements are made prior to shipment. International orders must be negotiated and arranged with the factory on a case by case basis.

CLAIMS

All claims must be made within ten (10) days of receipt of shipment. All FSC merchandise is inspected prior to shipping. Our liability ceases upon acceptance of merchandise by the carrier. All claims must therefore be filed with the carrier. DO NOT DEDUCT for damaged merchandise when paying invoices, as carrier reimburses the consignee. We will assist in collecting your claim, but the liability for payment of the claim remains with the carrier.

RETURNS

Authorizations must be obtained from FSC prior to returning merchandise. Merchandise must be returned freight prepaid and in original factory cartons. A minimum of 25% re-stocking fee will apply on all returns. If merchandise is returned without proper RETURN GOODS AUTHORIZATION NUMBERS (RGA), then items will be refused or sent back with no credit issued. Prices and terms are subject to change without notice.

12120 East Altamar Place
Santa Fe Springs, California 90670
t. 562.906.2644 • f. 562.906.2649
www.fsclighting.com

