


Project name: _____

Type: _____

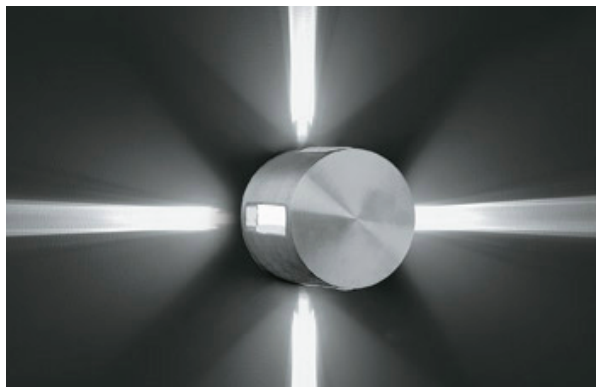

General information

Luminaire characteristics:

Power input: 3W

Lumens: TBC

Luminaire efficacy: TBC

Source: White LED 3000K, 4000k: 80CRI and blue LED.

Lumen maintenance: >70% of initial lumens at 50 000 hours (L70) LM-80 (LED) / LM-79 tested.

Optics: 2° beam with 1, 2 or 4 windows.

Body: Machined aluminum body and base plate with stainless steel screws and tempered glass.

Electrical: High efficiency electronic power supply, rated at 50 000 H, 120V.


Mounting: Install on a standard 4" Jbox.

Finish: Aluminum.


Weight: TBC

Warranty: 5 years limited warranty.

Certification: cULus listed.

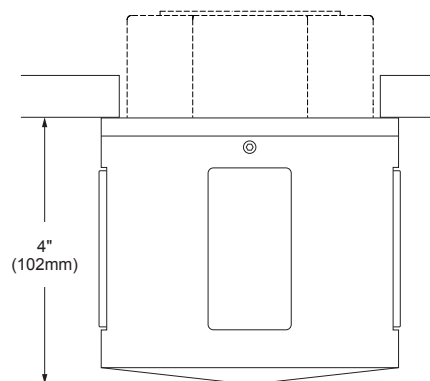

TOP VIEW

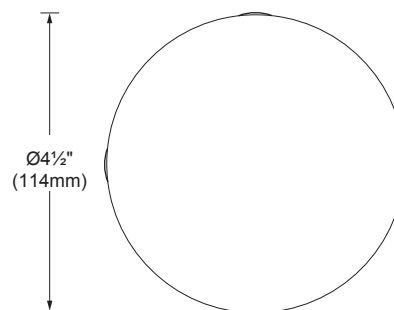

FRONT VIEW

ORDERING INFO

MODEL	LED	VOLTAGE	FINISH
<input type="radio"/> 0861 - 1 window	<input type="radio"/> 01 - 3000K	<input type="radio"/> 120 - 120V	<input type="radio"/> 11 - Aluminum
<input type="radio"/> 0862 - 2 windows	<input type="radio"/> 00 - 4000K		
<input type="radio"/> 0864 - 4 windows			

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: OCTOBER 24, 2014

MGD - R0

SISTEMALUX



9320 Boul. St-Laurent,
suite 100, Montréal (Québec)
Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107
www.sistemalux.com