

Features:

- :: Pre-applied 3M tape allows for fast, hassle free installation
- :: Field cuttable every 2" or 3 LED's.
- :: Available in Warm White 3000K, Cool White 6500K.
- :: Low profile for discreet locations.
- :: Easy connectors allow for simple plug and play installation.
- :: UV rays and infrared wavelength are non existent.
- :: **Sold in 16' rolls.**
- :: Highly efficient 400 Lumens PER/ FT for white LEDs.

Electrical:

- :: Elite LED tape light is offered with a 30W 12V driver (LB100-DR-12V-30W) that can power one run up to 6' or a 60W 12V driver (LB100-DR-12V-60W) that can power run up to 13', 100W driver that can power one run up to 16'.
- :: Maximum continuous run of 16'.
- :: Forward Voltage Drop: 1.92-2.2 V
- :: (LB100-DC-12V-100-120W)



LED



LB-LED

FLEXIBLE LED TAPE LIGHT

Interconnector

- LB103-ACC-4
- LB103-ACC-5
- LB103-ACC-6
- LB103-ACC-7



Power Connector

- LB103-ACC-8
- LB103-ACC-9
- LB103-ACC-10
- LB103-ACC-11



Driver

- LB100-DR-12V-30W
- LB100-DR-12V-60W
- LB100-DR-12V-100W



Coupling


- LB103-ACC-3



Power Adapter

- LB100-ACC-12

Dimensions:

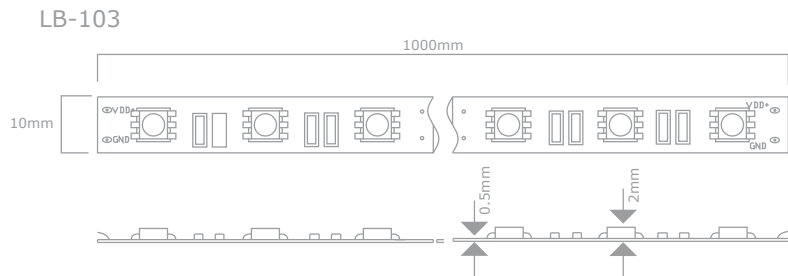

TYPE	COLOR	VOLTAGE	CURRENT (MA)	POWER (W/FT)	COLOR TEMP.	VIEW ANGLE	LM/FT	# OF DIODES/ FT	ACCESSORIES
LB103-15F-65K	○ COOL WHITE	12V DC	<1200	<4.4	6500K	130°	400	18	LB103-ACC-3 Coupling
LB103-15F-30K	○ WARM WHITE	12V DC	<1200	<4.4	3000K	130°	327	18	LB103-ACC-4 4" interconnector LB103-ACC-5 24" interconnector LB103-ACC-6 48" interconnector LB103-ACC-7 60" interconnector LB103-ACC-8 4" Power interconnector LB103-ACC-9 24" Power interconnector LB103-ACC-10 48" Power interconnector LB103-ACC-11 60" Power interconnector LB100-DR-12V-30W 30W Plug-in Driver LB100-DR-12V-60W 60W Plug-in Driver LB100-DC-12V-100-120 100W DC Hardwire Driver

LB100-ACC-MC Male Power Cable Connector

Must be ordered with Magnetic Driver

DIMMABLE COMPACT LED DC 120V MAGNETIC DRIVERS

APPROXIMATE SIZES AND WEIGHT

TYPE	Input(120V)	Output	Depth	Height	Width
LB100-DC-12-40-120*	1@40 Watts	12V DC	2-3/4"	5"	2"
LB100-DC-12-60-120*	1@60 Watts	12V DC	2-1/2"	6"	2-3/4"
LB100-DC-12-100-120	1@100 Watts	12V DC	2-1/2"	6"	2-3/4"
LB100-DC-24-40-120*	1@40 Watts	24V DC	2-3/4"	5"	2"
LB100-DC-24-60-120*	1@60 Watts	24V DC	2-1/2"	6"	2-3/4"
LB100-DC-24-100-120	1@100 Watts	24V DC	2-1/2"	6"	2-3/4"

Note:

*Class2 Dimmable LED DC Magnetic Transformer

DIMMABLE COMPACT LED DC 277V MAGNETIC DRIVERS

APPROXIMATE SIZES AND WEIGHT

TYPE	Input(277V)	Output	Depth	Height	Width
LB100-DC-12-40-277	1@40 Watts	12V DC	2-3/4"	5"	2"
LB100-DC-12-60-277	1@60 Watts	12V DC	2-1/2"	6"	2-3/4"
LB100-DC-12-100-277	1@100 Watts	12V DC	2-1/2"	6"	2-3/4"
LB100-DC-24-40-277	1@40 Watts	24V DC	2-3/4"	5"	2"
LB100-DC-24-60-277	1@60 Watts	24V DC	2-1/2"	6"	2-3/4"
LB100-DC-24-100-277	1@100 Watts	24V DC	2-1/2"	6"	2-3/4"


Mini Channel Mounting System

Dimensions

Length: 50"

Height: 1/2"

Width: 3/4"

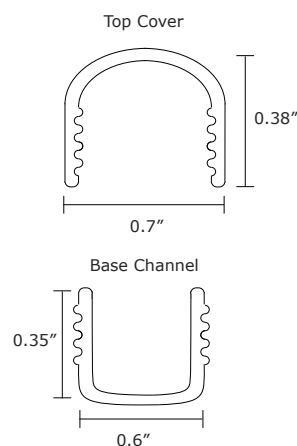

Features

Easy to snap together top and bottom design

Finish

LB100-BC-AL (Aluminium- Base Channel)

LB100-BC-WH (White- Base Channel)

LB100-BC-CL (Clear- Base Channel)

LB100-TC-CL (Clear- Top Cover)

LB100-TC-CLF (Clear Frosted- Top Cover)

LB100-TC-WH (White- Top Cover)

LB100-TC-WF (White Frosted- Top Cover)