

FEATURES & SPECIFICATIONS

INTENDED USE

The **Beam 20 Architectural Linear LED Suspension Lighting** fixtures bring clean lines and clear light to commercial LED or residential office lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.

DETAILS

W 2.5" x **L** 48" x **D** 4"

Construction: Cold-rolled steel with a highly reflective die-formed white painted steel reflector

Mounting: 48" Adjustable Aircraft cable

Lens: Snap-In Acrylic

Electrical: Meets Class 1 or Class 2 circuit

ADDITIONAL FEATURES

Voltage: 120-277, 50/60 Hz

Dimming: 0-10V 1%-100%

CRI: 80+






Power Factor: >.95

THD: <20

Life: 100,000 Hours

Operating Temperature: -4°F (-20°C) - 122°F (50°C)

Listings: UL Listed for Dry & Damp Location

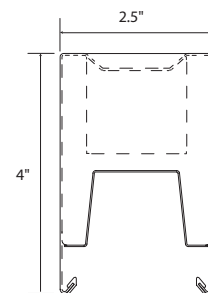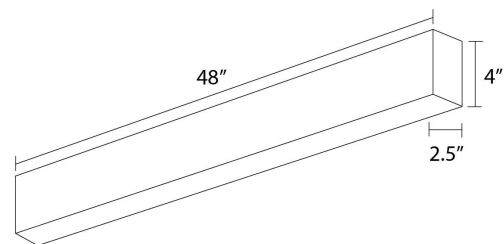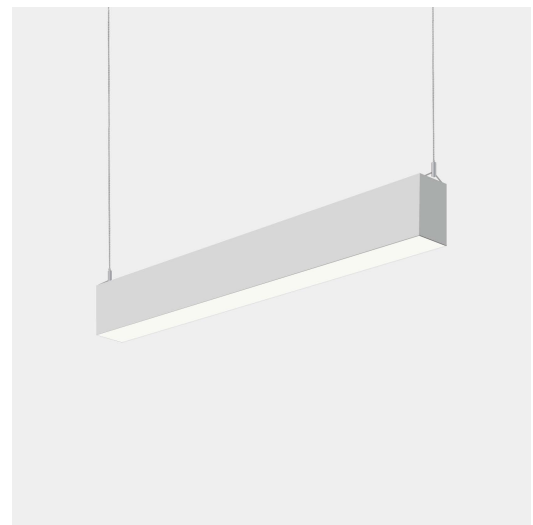

Ordering Information:

Example: (12175-4-UR12WD24-30K-WH)

Model	Wattage and Lumens	Color Temp	Finish	Mounting	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
12175-4 Pendant	UR18WD18 35.5 watts 2124 lms (44.8% Down) 2618 lms (55.2% Up) UR27WD27 53.3 watts 3186 lms (44.8% Down) 3927 lms (55.2% Up) UR18WD36 62.9 watts 4617 lms (59% Down) 3210 lms (41% Up) UR18WD54 80.8 watts 6334 lms (66.3% Down) 3218 lms (33.7% Up) Down Light Only R18W2400 22.8 watts 2423 lumens R27W3100 34.2 watts 3638 lumens R36W4100 43.2 watts 4595 lumens R54W6200 61.2 watts 6509 lumens	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BK Black CU Custom	AC48 48" Adjustable Aircraft Cable (Standard) AC96 96" Adjustable Aircraft Cable ST24 24" Stem ST48 48" Stem	EM5 5W Emergency Ballast EM8 8W Emergency Ballast EM16 16W Emergency Ballast OS Occupancy Sensor w/ Daylight Harvesting DS Daylight Dimming Photo Sensor CONT Continuous Row Mount